

FROM CONVERSATION TO QUERY EXECUTION: BENCHMARKING USER AND TOOL INTERACTIONS FOR EHR DATABASE AGENTS

Gyubok Lee¹, Woosog Chay¹, Heeyoung Kwak², Yeong Hwa Kim²
Haanju Yoo², Oksoon Jeong³, Meong Hi Son³, Edward Choi¹
KAIST¹ NAVER Cloud² Samsung Medical Center³
{gyubok.lee, edwardchoi}@kaist.ac.kr¹

ABSTRACT

Despite the impressive performance of LLM-powered agents, their adoption for Electronic Health Record (EHR) data access remains limited by the absence of benchmarks that adequately capture real-world clinical data access flows. In practice, two core challenges hinder deployment: *query ambiguity* from vague user questions and *value mismatch* between user terminology and database entries. To address this, we introduce *EHR-ChatQA*, an interactive database question answering benchmark that evaluates the end-to-end workflow of database agents: clarifying user questions, using tools to resolve value mismatches, and generating correct SQL to deliver accurate answers. To cover diverse patterns of query ambiguity and value mismatch, EHR-ChatQA assesses agents in a simulated environment with an LLM-based user across two interaction flows: Incremental Query Refinement (IncreQA), where users add constraints to existing queries, and Adaptive Query Refinement (AdaptQA), where users adjust their search goals mid-conversation. Experiments with state-of-the-art LLMs (e.g., o4-mini and Gemini-2.5-Flash) over five i.i.d. trials show that while agents achieve high Pass@5 of 90–95% (at least one of five trials) on IncreQA and 60–80% on AdaptQA, their Pass⁵ (consistent success across all five trials) is substantially lower by 35–60%. These results underscore the need to build agents that are not only performant but also robust for the safety-critical EHR domain. Finally, we provide diagnostic insights into common failure modes to guide future agent development. The code is available at <https://github.com/glee4810/EHR-ChatQA>.

1 INTRODUCTION

Large Language Models (LLMs) are increasingly operating as autonomous agents, interacting with external environments to solve complex tasks. One key application is interfacing with structured databases, which can substantially enhance data accessibility for non-technical users. This capability is particularly impactful in high-stakes domains such as Electronic Health Records (EHRs), where enabling natural language queries over vast patient data repositories has the potential to fundamentally transform both clinical research and patient care (Ohno-Machado, 2011; Yang et al., 2022). To assess such capabilities, the prevailing evaluation paradigm has relied on text-to-SQL benchmarks (e.g., Spider (Yu et al., 2018), MIMICSQL (Wang et al., 2020), EHRSQL (Lee et al., 2022), BIRD (Li et al., 2023)), which measure a model’s ability to translate natural language questions into SQL queries. However, these benchmarks primarily emphasize the isolated task of mapping a single, well-formed question to SQL, a setting that fails to capture the complexities of how clinicians interact with EHRs.

To further investigate the gap between this evaluation paradigm and real-world clinical needs, we collaborated with a major academic medical center and reviewed internal text-to-SQL query logs. This analysis revealed that existing benchmarks are not suitable for capturing two core real-world challenges, which significantly hinders the adoption of these models: (1) *Query Ambiguity*¹: Users

¹While linguistics distinguishes it from vagueness (a lack of specificity), we adopt the common NLP convention of using “ambiguity” to refer to any query requiring clarification.

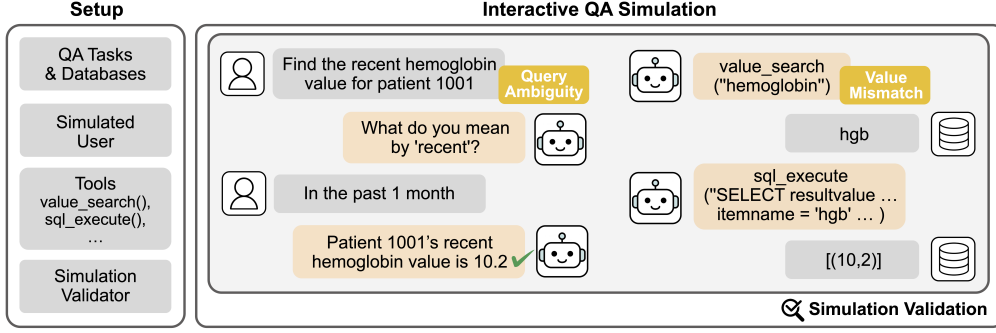


Figure 1: Overview of EHR-ChatQA. Our benchmark places an agent in a simulated environment with an LLM-powered user and tools. The agent must manage the full workflow: clarifying vague user questions, resolving terminology mismatches, generating and executing accurate SQL, and returning the final answer. Each interaction trace is validated for accurate evaluation.

often pose vague questions that do not fully capture their true intent (e.g., a request such as “Show me recent labs” lacks specifics such as test types or time ranges) (Wang et al., 2023; Saparina & Lapata, 2024; Dong et al., 2025). (2) *Value Mismatch*: Clinical terms in EHRs vary due to specialized database naming conventions and often differ from everyday language (e.g., “Lopressor” may not match the database entry “metoprolol tartrate”), creating a terminological gap (Holmes et al., 2021; De Mello et al., 2022) that must be bridged for accurate SQL generation.

Addressing these challenges requires moving beyond static, single-turn SQL generation to an environment where an agent can clarify a user’s intent, invoke necessary tools to navigate complex EHR schemas and clinical values, and synthesize all relevant information to generate an accurate SQL query. To bridge this gap, we introduce *EHR-ChatQA*, an interactive database question answering (QA) benchmark designed to assess this end-to-end agentic workflow, from conversation to query execution, in the EHR domain. By placing agents in a simulated environment with both an LLM-based user and a suite of tools, EHR-ChatQA provides a holistic evaluation of agent capabilities in interactive clinical data access flows, with each interaction trace verified by a dedicated validator. Grounded in real-world clinical QA scenarios and two publicly available EHR databases (MIMIC-IV (Johnson et al., 2023) and eICU (Pollard et al., 2018)), our benchmark consists of tasks categorized into two different interaction flows designed for various query ambiguities and value mismatches: Incremental Query Refinement (IncreQA), which evaluates scenarios where users add new constraints to a query, and Adaptive Query Refinement (AdaptQA), which assesses an agent’s ability to reformulate its plan when users’ goals are modified mid-conversation.

Our evaluation of various state-of-the-art LLMs on EHR-ChatQA reveals a critical lack of robustness under diverse conversation paths. While agents often succeed in at least one of five attempts on a task (Pass@5), their ability to succeed consistently in all five attempts (Pass⁵) is substantially lower. This performance gap exceeds 30% for IncreQA and 50% for AdaptQA. This inconsistency highlights a crucial lack of reliability in current agents, raising significant concerns for their deployment in safety-critical domains such as EHRs and pointing to key areas for future research.

The main contributions of our work are summarized as follows:

- We propose EHR-ChatQA, the first interactive benchmark for EHR QA that holistically evaluates agents’ interactive, end-to-end workflows using simulated users and a set of customizable tools for schema exploration, value exploration, and web search.
- Grounded in real-world clinical QA scenarios and two publicly available EHR databases, the benchmark contains two interaction flows to reflect various query ambiguity and value mismatch patterns.
- Our evaluation of various LLMs reveals a critical performance gap between an agent’s optimistic success (Pass@5) and its consistent success (Pass⁵), providing diagnostic insights for developing more performant and reliable agents in interactive EHR QA.

Table 1: Comparison of recent benchmarks categorized by core agent capabilities. EHR-ChatQA is the first benchmark to comprehensively evaluate database agents in the aspects ranging from conversational ability to effective tool use in the EHR domain. “Value Explor.” indicates the mapping of user terminology to database entries (e.g., “WBC” → “white blood cell count”). Δ denotes resolution of ambiguity through SQL suggestions instead of user clarification.

Benchmark	Conversational Ability		Tool-Using Ability		Domain
	User Multi-turn	Query Ambiguity	Tool Use	Value Explor.	
Spider (Yu et al., 2018)	×	×	×	×	×
SParC (Yu et al., 2019b)	✓	×	×	×	×
CoSQL (Yu et al., 2019a)	✓	✓	×	×	×
EHRSQL (Lee et al., 2022)	×	×	×	×	✓
BIRD (Li et al., 2023)	×	×	×	×	×
AgentBench (Liu et al.)	×	×	✓	×	×
EHR-SeqSQL (Ryu et al., 2024)	✓	×	×	×	✓
PRACTIQ (Dong et al., 2025)	✓	Δ	×	×	×
Tau-Bench (Yao et al., 2025)	✓	✓	✓	×	×
ToolDial (Shim et al., 2025)	✓	✓	✓	×	×
MedAgentBench (Jiang et al., 2025)	×	×	✓	×	✓
MedAgentGym (Xu et al., 2025)	×	×	✓	×	✓
EHR-ChatQA (Ours)	✓	✓	✓	✓	✓

2 RELATED WORK

Text-to-SQL Benchmarks Text-to-SQL research has largely focused on translating a single, well-defined question into an SQL query. Benchmarks such as Spider (Yu et al., 2018) and BIRD (Li et al., 2023) are prominent examples that have shaped this paradigm. While other benchmarks such as SParC (Yu et al., 2019b), CoSQL (Yu et al., 2019a), and PRACTIQ (Dong et al., 2025) introduced conversational context, their evaluation scope is often limited by predefined interaction patterns, such as requiring the model to generate an SQL query each turn or to expect a type of responses based on the script. This evaluation setting prevents them from capturing the open-ended and exploratory nature of realistic user interactions, thereby falling short of testing agents’ ability to resolve query ambiguity and value mismatch. EHR-ChatQA is a benchmark dedicated to bridging this gap by explicitly evaluating agents’ exploratory and interactive capabilities through user simulations.

EHR Question Answering The unique challenges of the medical domain have inspired several QA benchmarks for structured EHR data. Text-to-SQL benchmarks, from single-turn settings such as MIMICSQL (Wang et al., 2020) and EHRSQL (Lee et al., 2022) to the multi-turn EHR-SeqSQL (Ryu et al., 2024), have advanced querying on complex EHR schemas but lack support for resolving query ambiguity and value mismatch. More recently, agent-based benchmarks for EHRs such as MedAgentBench (Jiang et al., 2025) and MedAgentGym (Xu et al., 2025) tackle a broad range of clinical and biomedical tasks. However, their reliance on initial non-ambiguous task instructions still bypasses the need for dynamic, interactive resolution of query ambiguity and value mismatch, which are essential for real-world, interactive clinical QA. EHR-ChatQA aims to bridge this gap by explicitly requiring the simulated user to start from a vague question and allowing the agent to autonomously resolve the task.

Conversational and Tool-Using Agent Evaluation Evaluating LLM agents in dynamic environments has spurred progress in two key areas: tool-using agent benchmarks (Yao et al., 2022; Liu et al.), which assess instrumental competence, and frameworks for evaluating conversational skills in task-oriented dialogues, from large-scale curated datasets (Budzianowski et al., 2018; Rastogi et al., 2020) to dynamic user simulations (Sekulić et al., 2024). Recent works such as Tau-Bench (Yao et al., 2025) and ToolDial (Shim et al., 2025) combine these paradigms to evaluate the critical dual interaction loop between agents, users, and tools. EHR-ChatQA extends this framework to question answering over EHR databases. As shown in Table 1, although prior works focus on resolving query ambiguity and leveraging general tools for complex tasks, they do not specifically capture the challenges of interactive clinical data access, particularly value mismatch (Holmes et al., 2021; De Mello et al., 2022). EHR-ChatQA is designed to holistically address these challenges, grounded in real-world QA scenarios and EHR databases.

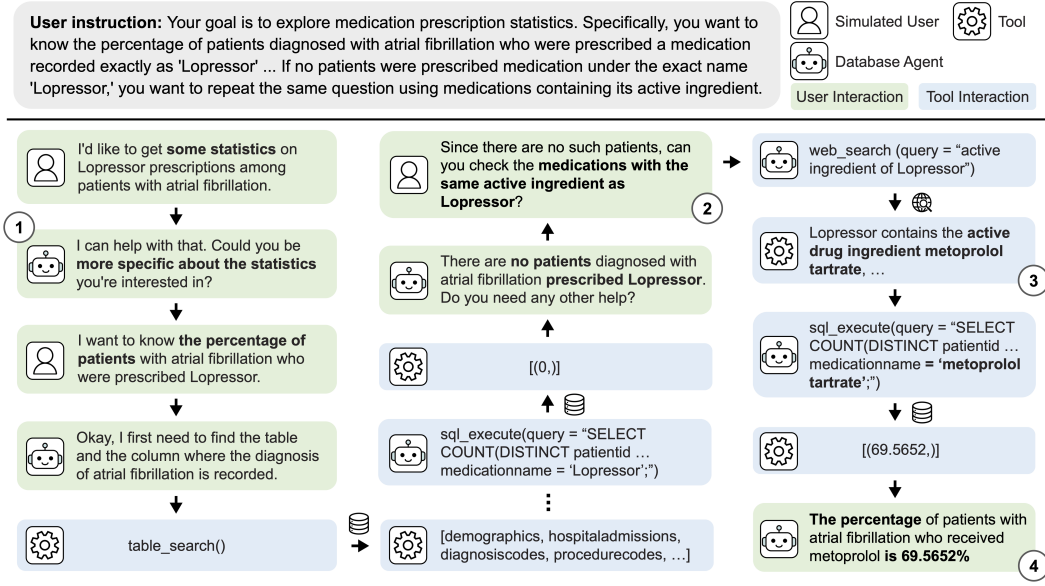


Figure 2: Example interaction trace in EHR-ChatQA (AdaptQA). Given a vague initial user question, the agent clarifies the request (1) by refining “some statistics” into the specific goal of “the percentage.” When the initial query yields no matching records due to a value mismatch, the user guides the agent to search for the active ingredient instead (2). The agent then incorporates clinical knowledge retrieved via `web_search()` to reformulate the query (3), and finally executes the revised query to produce the correct answer (4).

3 THE EHR-CHATQA BENCHMARK

3.1 TASK FORMULATION

The task instances in EHR-ChatQA can be formulated in the POMDP framework as $(\mathcal{S}, \mathcal{A}, \mathcal{T}, \mathcal{R}, \Omega)$. This formulation captures the inherent uncertainty and the sequential nature of translating an ambiguous user request into an executable query. The state $s \in \mathcal{S}$ is latent and includes all information relevant to solving the task: the user’s true but unobserved intent (i.e., user instruction), the full conversation history, the contents of the EHR database, and any accessible external knowledge. The agent’s action space $\mathcal{A}$ models the dual interaction loop: (1) user interaction, including asking clarifying questions or providing answers, and (2) tool interaction, including invoking calls to explore the database schema, search relevant values, or access external web knowledge when necessary. After taking an action $a \in \mathcal{A}$, the agent receives an observation $o \in \Omega$, which is either a natural language response from the user or the output from a tool. The transition dynamics $\mathcal{T}$ are a hybrid of deterministic and stochastic processes: tool interactions with the database are deterministic, while the LLM-based user’s responses and web search results are stochastic. The reward function $\mathcal{R}$ is binary, defined as $r = 1$ if the agent’s final answer matches the ground truth and $r = 0$ otherwise. In our evaluation, the reward assignment is performed in a rule-based manner (see Appendix A.5).

3.2 BENCHMARK COMPONENTS

Task Instances and EHR Databases Each task instance defines a unique interactive QA scenario, containing a user instruction that specifies the LLM-based user’s query goal and outlines the intended conversation flow (e.g., “You want to know the number of patients prescribed with Lopressor... If no patient is found, you want the number of patients prescribed with medications with the same active ingredient...”). Each instance also includes the answer to the interaction goal and the ground-truth (GT) SQL queries for evaluation purposes. All user instructions and answers are grounded in patient data stored in two EHR database schemas (MIMIC-IV and eICU), and clinical knowledge is essential for locating, filtering, and reasoning over the retrieved information. The

benchmark consists of 350 task instances, distributed across the two databases and the two interaction flows, as shown in Table 2.

Tools Default tools provided in this benchmark include functionalities for schema exploration (`table_search`, `column_search`), value exploration (`value_substring_search`, `value_similarity_search`²), external knowledge retrieval (`web_search`), and final query execution (`sql_execute`). The schema and value exploration tools, supplemented with SQL and physician-level knowledge, provide sufficient resources for constructing correct SQL queries, since SQL query annotation was performed using an interface restricted to these tools (see Section 4.2). The `web_search()` tool is optionally provided to the agent to supplement or confirm clinical knowledge, as accurate handling of such knowledge is critical in the EHR domain. More details on tool specifications are provided in Appendix A.2.

Simulated User To evaluate user interaction at scale and measure agent performance across diverse conversation paths, we use an LLM-based user simulator that leverages a certain level of stochasticity in user utterances. We use the self-reflection framework (Shinn et al., 2023) with Gemini-2.0-Flash at a temperature of 1.0. The simulated user is initialized with a system prompt (see Appendix A.3.2) containing a user instruction and a set of behavioral rules. These rules include intentionally starting with a vague initial query, which forces the agent to engage in dialogue for clarification. The rules also define the conditions for ending the conversation: either the agent successfully retrieves and provides the information requested by the user, or the agent repeatedly fails to retrieve relevant information and shows no sign of progress. Further implementation details are provided in Appendix A.3.1.

Simulation Validator There are occasions where LLM-based simulations deviate from the intended behavior, not because of the agent’s failure but because the user simulator itself deviates from its instructions. To mitigate this and ensure reliable evaluation of agents, we implement an LLM-as-a-judge classifier (Zheng et al., 2023) as a *validator*³. After each completed simulation, the validator reviews the entire dialogue trajectory. If it determines that the simulated user has violated its given instruction or rules, the simulation trace is considered invalid and subsequently rerun, regardless of the task’s outcome. The prompt used in the validator is provided in Appendix A.3.3.

4 BENCHMARK CONSTRUCTION

4.1 INTERACTION FLOWS

To capture a wide range of query ambiguity and value mismatch patterns grounded in various clinical QA scenarios, we include two different interaction flows for the simulated user to follow:

- **Incremental Query Refinement (IncreQA):** This flow tests an agent’s ability to maintain conversational context as the user incrementally constructs a query by adding new constraints. The agent must integrate new details into the existing context without losing prior information. Examples of such constraints include adding a patient ID to a cohort of patients, specifying event timing (e.g., “diagnosed after a year of XXXX”), or adding related medical events to existing queries (e.g., “a heart attack following a diabetes diagnosis”) (see Appendix A.1.1 for a sample task instance).
- **Adaptive Query Refinement (AdaptQA):** This flow tests an agent’s ability to adapt its query plan when a user modifies the original goal mid-conversation (e.g., searching for a medication within the same or different drug classes if the initially requested one is not found, rolling back when partial information is missing, or adopting fallback strategies when no relevant data is available). By design, these tasks require more advanced value mismatch resolution than IncreQA, often going beyond synonym matching (see Appendix A.1.2).

²Text columns are pre-indexed. We use OpenAI’s text-embedding-3-large.

³We use Gemini-2.5-Flash at a temperature of 0.0.

Table 2: EHR-ChatQA task statistics. ★ indicate the databases are preprocessed and their schemas are renamed.

	IncreQA	AdaptQA	Total
MIMIC-IV★	145	32	177
eICU★	141	32	173
Total	286	64	350

4.2 ANNOTATION PROCESS

A core team of three annotators (two graduate-level computer science students and one physician) led the initial development, from drafting through internal quality checks. This phase was followed by beta testing with 38 graduate-level contributors, whose feedback informed the final revisions.

4.2.1 EHR DATABASES

To evaluate agents’ generalizability to different EHR structures, we use two publicly available EHR databases with distinct schemas and data recording practices: MIMIC-IV (Johnson et al., 2023), which contains detailed ICU data from Beth Israel Deaconess Medical Center, and eICU (Pollard et al., 2018), which includes ICU data from multiple U.S. hospitals. For instance, eICU stores prescription records as a single string such as “clopidogrel 75 mg,” whereas MIMIC-IV splits it across three separate columns (*drug name*, *dosage*, *unit of measurement*) as “clopidogrel,” “75,” and “mg.” For the basis of our task instances, we use a subset of records from the privacy-safe demo versions of these databases. Although they contain fewer patients, these demos retain the same schema complexity as the originals.

A key challenge we identified is that SOTA LLMs often memorize the original schemas of these popular databases, allowing them to generate SQL without genuine schema exploration. To ensure that our evaluation truly tests an agent’s ability to navigate arbitrary databases, we rename all table and column names (e.g., “patients” to “demographics”). The resulting databases, MIMIC-IV★ and eICU★, compel agents to rely on schema exploration tools rather than their prior knowledge. Further details on this process are provided in Appendix B.2.

4.2.2 INCREQA ANNOTATION

To create the IncreQA tasks, we begin by curating and adapting clinically relevant queries from two primary sources: the EHRSQL dataset (Lee et al., 2022), originally collected from over 200 hospital professionals, and a set of question-SQL pairs internally stored at our collaborating center. Next, we use xAI’s Grok 3 (xAI, 2025) to generate initial drafts of user instructions from the SQL queries, formulating them in a narrative format instead of a question format. The core annotation team then manually writes these instructions, and while doing so, they identify specific, relevant values using the database interface (e.g., inserting “malignant neoplasm of breast” into a diagnosis name placeholder). Corresponding SQL queries are then written using Common Table Expressions (CTEs) for readability⁴ and verified manually. As a final crucial step, the database values in the user instructions are rephrased into everyday language (e.g., “malignant neoplasm of breast” becomes “breast cancer”) to introduce value mismatch challenges.

4.2.3 ADAPTQA ANNOTATION

AdaptQA tasks are designed around conversational flows that mimic clinical interactions requiring query goal adjustments. To do this, we first define eight categories of query modification, including interaction flows such as queries that involve traversing medication nomenclature (e.g., brand ↔ generic) and switching a primary lab test to its clinical alternative for a condition (e.g., hemoglobin → hematocrit). (See Appendix B.3 for the categories). Based on these categories and EHR database schemas, we generate more detailed user instructions using Grok. After physician verification, the core team manually modifies these instructions using the actual values stored in the databases, while taking into account the context of each instruction. After the instructions are created, the corresponding SQL pairs are annotated, and the values in the instructions are rephrased into common terms, similar to the process used in IncreQA.

⁴We use CTEs for complex SQL annotations to improve maintainability. See Appendix B.1 for details.

Model	IncreQA				AdaptQA			
	SR-5 ($\uparrow$)	Pass@5 ($\uparrow$)	Pass $^{\wedge}$ 5 ($\uparrow$)	Gap-5 ($\downarrow$)	SR-5 ($\uparrow$)	Pass@5 ($\uparrow$)	Pass $^{\wedge}$ 5 ($\uparrow$)	Gap-5 ($\downarrow$)
<i>Closed-source Models</i>								
Gemini-2.5-Flash	73.1	91.3	47.9	43.4	34.7	64.1	6.2	57.9
Gemini-2.0-Flash	66.2	86.4	37.8	48.6	26.6	54.7	1.6	53.1
o4-mini	81.0	95.1	58.4	36.7	43.8	78.1	15.6	62.5
GPT-4o	64.0	86.7	34.6	52.1	26.6	46.9	<u>10.9</u>	36.0
GPT-4o-mini	49.0	75.2	22.4	52.8	18.1	40.6	4.7	35.9
<i>Open-source Models</i>								
Llama 3.3-70B	38.6	66.8	11.2	55.6	12.2	37.5	0.0	<u>37.5</u>
Qwen3-32B	50.4	79.4	18.2	61.2	20.3	45.3	0.0	45.3

Table 3: Overall results on EHR-ChatQA across two different interaction flows: Incremental Query Refinement (IncreQA) and Adaptive Query Refinement (AdaptQA), averaged over combined MIMIC-IV* and eICU* samples. Metrics include: SR-5 (average success rate over 5 trials), Pass@5 (success in at least one of 5 trials), Pass $^{\wedge}$ 5 (success in all 5 trials), and Gap-5 (Pass@5 - Pass $^{\wedge}$ 5).

4.3 QUALITY ASSURANCE

To create a high-quality evaluation benchmark, our quality assurance procedure consists of an internal validation process followed by an external beta-testing phase. The internal validation has two components, targeting both the task instances and the simulation environment. First, to assess the quality of each task instance, we employ an iterative refinement loop. This involves running preliminary simulations to flag tasks that consistently cause agent failures for manual review. The review process focuses on verifying whether the annotated SQL is correctly aligned with the user instructions and on removing ambiguities in the instructions. Second, we validate the quality of the simulation environment by manually reviewing failed dialogue trajectories, in particular the agent’s value-linking logic (e.g., when a user instruction specifies hemoglobin, we check whether the instruction is clear enough to guide only to “Hb,” not to other similar terms such as “Hb C”). Following this internal validation, the benchmark underwent beta testing over two months with 38 graduate-level contributors. During this phase, the benchmark was progressively improved based on their feedback regarding task clarity and user behavior.

5 EXPERIMENTS

5.1 EXPERIMENTAL SETUP

Models We evaluate leading closed-source and open-source LLMs with strong tool-calling capabilities. For closed-source models, we use OpenAI’s o4-mini and GPT-4o, as well as Google’s Gemini-2.5-Flash and Gemini-2.0-Flash. For open-source models, we evaluate Llama 3.3-70B and Qwen3-32B, served on four NVIDIA A6000 GPUs using the vLLM library (Kwon et al., 2023). All implemented agents are provided with a set of behavioral rules (see Appendix C.2), database-specific SQL generation rules (see Appendix A.4), and evaluation rules (see Appendix A.5). The temperature for all agent LLMs is set to 0.0, and each simulation is limited to a maximum of 30 agent actions. The agent implementation details are provided in Appendix C.

Evaluation Metrics We evaluate agent performance using four metrics: SR-k, Pass@k, Pass $^{\wedge}$ k, and Gap-k. SR-k measures the average success rate across k i.i.d. trials for each task. Pass@k (Chen et al., 2021), representing an agent’s optimistic performance, is the proportion of tasks solved in at least one of these k trials. Conversely, Pass $^{\wedge}$ k (Yao et al., 2025) assesses consistent and reliable performance by measuring the proportion of tasks solved in all k trials. The final metric, Gap-k, is the difference between Pass@k and Pass $^{\wedge}$ k. While SR-k serves as a stable measure of overall performance due to its lower sensitivity to the number of trials, k, the other three metrics vary with k. In particular, Gap-k indicates an agent’s robustness across diverse conversation paths and is an important indicator of potential degradation in performance over multiple runs, which must be avoided in the safety-critical EHR domain. We set k=5 throughout the experiments.

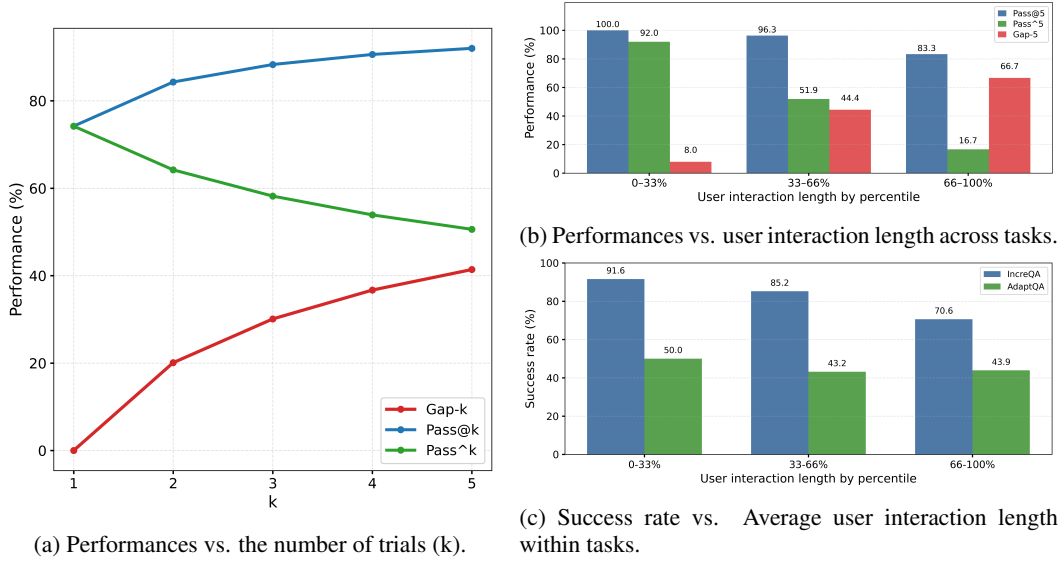


Figure 3: Detailed performance of the o4-mini-powered agent.

5.2 MAIN RESULTS

Overall Result Table 3 summarizes the performance of various state-of-the-art LLMs on EHR-ChatQA. Closed-source models consistently outperform their open-source counterparts. o4-mini achieves the highest overall performance, with SR-5 scores of 81.0% on IncrQA and 43.8% on AdaptQA, followed by Gemini-2.5-Flash. Open-source models such as Qwen3-32B and Llama 3.3-70B show clear limitations, particularly struggling with AdaptQA (12.2% and 20.3% SR-5, respectively). While closed-source models perform strongly on IncrQA, with scores ranging from 60% to 80%, their performance drops to the 30-40% range on AdaptQA. This indicates that AdaptQA requires more advanced adaptive query refinement and sophisticated value exploration. The most salient finding is the substantial discrepancy between the optimistic performance (Pass@5) and the consistent performance (Pass^5).

Interaction and Cost Analysis On average, agents engage in 4.9 user interactions and 7.0 tool interactions per IncrQA task, and 5.5 and 10.2 per AdaptQA task, respectively, indicating greater complexity for AdaptQA. The environment setup, which employs a simulated user and validator, costs approximately \$0.0043 per IncrQA task and \$0.0065 per AdaptQA task. The total cost of running the full benchmark over five runs, using o4-mini as the database agent, is approximately \$100 across all task instances, whereas the cost using Gemini-2.5-Flash is about \$61.

Further Performance Analysis A deeper analysis of the top model, o4-mini, reveals key factors behind its performance inconsistency. As expected, Gap-k widens with more trials (k), since the condition for consistent success becomes stricter (Figure 3a). Furthermore, trials involving more user interactions tend to have lower overall success rates as well as higher inconsistency (Figure 3b). This trend holds even for individual trials, where a trial’s success is negatively correlated with its relative number of user-agent interactions even within the same task (Figure 3c).

5.3 COMMON ERROR CASES IN INTERACTIVE DATABASE AGENTS

We conduct a detailed error analysis of agents using o4-mini and Gemini-2.5-Flash to understand the root causes of failures and the factors driving the performance gap. We categorize failures into two distinct groups: (1) Consistent Failures, where the agent fails across all five trials, indicating fundamental limitations; and (2) Inconsistent Failures, where the agent succeeds in at least one trial but not all, highlighting brittleness to variations in conversation paths.

Consistent Failures Consistent failures are dominated by difficulties in handling value mismatch and in generating complex SQL. The largest category, *Value Linking Errors* (46.9%), arises when an agent fails to retrieve all relevant database terms. This includes overlooking drug brand names (e.g., “Coumadin” for warfarin), failing to match textual variations (e.g., finding “essential (primary) hypertension”), and being unable to resolve synonyms or abbreviations (e.g., “wbc” for “white blood cells” and “leukocytes”). The second major category, *SQL Generation Errors* (25.0%), involves subtle yet critical flaws in query logic. For instance, agents often misinterpret the timing of events, querying a patient’s overall first hospital visit instead of their first visit for a specific diagnosis. The remaining failures fall into *Rule Violations* (15.6%), where agents disregard explicit instructions, and *Limited Clinical Knowledge* (12.5%), which leads to improper data filtering, such as failing to select only the “direct” procedures required for aneurysm resection conducted to a patient.

Inconsistent Failures Inconsistent failures reveal the fragility of current agents. Small variations in the dialogue trajectory, stemming from stochastic user responses, can lead to drastically different outcomes. *SQL Generation Issues* (71.8%): SQL errors are the primary driver of this inconsistency. Slight variations in user phrasing can disrupt the agent’s context tracking, leading to SQL that omits crucial context from previous turns, which is the same context handled correctly in successful trials. For instance, in an IncreQA task, a user might first ask for “patients with diabetes”. In a successful trial, the follow-up “How many of those are over 65?” correctly maintains both constraints. However, in a failed trial, a subtle rephrasing such as “And what about their age, specifically over 65?” can cause the agent to drop the initial “diabetes” constraint, erroneously querying the age of the entire patient population. The remaining errors are similar to those observed in consistent failure cases, including incomplete value retrieval (15.4%) and occasional rule violations (5.1%).

Diagnostic Insights To address consistent failures, which are largely driven by value mismatch, future work should improve the agent’s exploration strategies. Agents must comprehensively find relevant database entries. To mitigate the performance gap across multiple runs reflected in inconsistent failures, the priority should be to improve context management. This requires developing techniques that enforce state-tracking consistency across linguistic variations, such as explicit query state representation or specialized fine-tuning focused on context-dependent query refinement.

6 CHALLENGES IN SIMULATION-BASED EVALUATION

Simulation-based benchmarks present unique challenges due to the stochastic nature of LLM-generated dialogues. In our experiments, the common error types that cause simulation re-runs include: no final check (39.3%), where users end conversations without verifying that the agent’s answer fully addresses the goal⁵; missing conditions (20.7%), where users omit minor details (e.g., specific time constraints) before concluding; performing agent-like tasks (17.0%), where users act as database agents, such as by writing SQL queries; accepting unverified information (8.9%), where users accept incorrect details provided by the agent; and various rule violations (14.1%), which include miscellaneous stylistic errors, such as using overly polite, AI-like phrases. While we make tremendous efforts to remove ambiguities in user instructions, many cost-effective LLMs, including open-source models and Gemini-2.0-Flash, are still not fully reliable at following unfamiliar or detailed instructions, even when equipped with self-reflection mechanisms. However, if cost is the primary concern, pairing a cost-effective user with a powerful but costly validator is an effective compromise. We believe this concern will diminish as more powerful and cost-effective LLMs demonstrate stronger instruction-following capabilities.

7 CONCLUSION

We introduce EHR-ChatQA, the first conversational benchmark for end-to-end evaluation of database agents in the safety-critical EHR domain. Moving beyond static text-to-SQL, EHR-ChatQA assesses an agent’s ability to resolve query ambiguity and value mismatch through user conversation and active tool use. Our evaluation of state-of-the-art LLMs on two interaction flows, Incremental (IncreQA) and Adaptive (AdaptQA), reveals a critical robustness gap: the difference between succeeding in one of five independent trials (Pass@5) and all five (Pass⁵) for some models

⁵This rule is intentionally included in user instructions to prevent open-ended questions from excessively deviating and leading to non-terminating conversations.

exceed 35% in IncreQA and 60% in AdaptQA. This gap is mainly rooted in the agent’s failures in accurate context management and SQL generation. We believe EHR-ChatQA can serve as a valuable resource for advancing database agents in interactive question answering over EHRs.

8 ETHICS STATEMENT

We adhere to the ICLR Code of Ethics and prioritize ethical considerations in this research. To protect patient privacy, EHR-ChatQA utilizes publicly available, de-identified EHR datasets (MIMIC-IV-demo and eICU-demo), which are free of Protected Health Information (PHI), allowing for the safe evaluation of LLMs. Our findings highlight a significant performance gap in current state-of-the-art models between optimistic and consistent agent performances across QA tasks, raising concerns about the premature deployment of these agents in safety-critical clinical environments. We also acknowledge that the source EHR databases may contain inherent biases reflecting the demographics and clinical practices of the originating U.S. hospitals.

9 REPRODUCIBILITY STATEMENT

To ensure the reproducibility of our experiments, we provide comprehensive resources, including the complete EHR-ChatQA benchmark with all 350 task instances and the EHR databases, an evaluation framework, a tool suite, and a simulation environment, which will be available in our GitHub repository. Detailed methodologies are provided in the appendices, covering database preprocessing and schema renaming (Appendix B.2), implementation details for the simulated user and validator (Appendix A.3), and the implementation of the database agents (Appendix C). Due to the stochasticity of the simulated users, the exact numbers reported in the experiments may not be perfectly reproduced, and occasional user-side errors may persist as these LLMs are not perfectly instruction-following. However, we have introduced a simulation validator to mitigate such issues, and we expect that their occurrence will decrease as LLM steerability continues to improve.

REFERENCES

- Paweł Budzianowski, Tsung-Hsien Wen, Bo-Hsiang Tseng, Iñigo Casanueva, Stefan Ultes, Osman Ramadan, and Milica Gasic. Multiwoz-a large-scale multi-domain wizard-of-oz dataset for task-oriented dialogue modelling. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pp. 5016–5026, 2018.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde De Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*, 2021.
- Blanda Helena De Mello, Sandro José Rigo, Cristiano André Da Costa, Rodrigo da Rosa Righi, Bruna Donida, Marta Rosecler Bez, and Luana Carina Schunke. Semantic interoperability in health records standards: a systematic literature review. *Health and technology*, 12(2):255–272, 2022.
- Mingwen Dong, Nischal Ashok Kumar, Yiqun Hu, Anuj Chauhan, Chung-Wei Hang, Shuaichen Chang, Lin Pan, Wuwei Lan, Henghui Zhu, Jiarong Jiang, Patrick Ng, and Zhiguo Wang. PRAC-TIQ: A practical conversational text-to-SQL dataset with ambiguous and unanswerable queries. In Luis Chiruzzo, Alan Ritter, and Lu Wang (eds.), *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pp. 255–273, Albuquerque, New Mexico, April 2025. Association for Computational Linguistics. ISBN 979-8-89176-189-6. URL <https://aclanthology.org/2025.naacl-long.13/>.
- John H Holmes, James Beinlich, Mary R Boland, Kathryn H Bowles, Yong Chen, Tessa S Cook, George Demiris, Michael Draugelis, Laura Fluharty, Peter E Gabriel, et al. Why is the electronic health record so challenging for research and clinical care? *Methods of information in medicine*, 60(01/02):032–048, 2021.

- Yixing Jiang, Kameron C Black, Gloria Geng, Danny Park, Andrew Y Ng, and Jonathan H Chen. Medagentbench: Dataset for benchmarking llms as agents in medical applications. *arXiv preprint arXiv:2501.14654*, 2025.
- Alistair EW Johnson, Lucas Bulgarelli, Lu Shen, Alvin Gayles, Ayad Shammout, Steven Horng, Tom J Pollard, Sicheng Hao, Benjamin Moody, Brian Gow, et al. Mimic-iv, a freely accessible electronic health record dataset. *Scientific data*, 10(1):1, 2023.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with pagedattention. In *Proceedings of the ACM SIGOPS 29th Symposium on Operating Systems Principles*, 2023.
- Gyubok Lee, Hyeonji Hwang, Seongsu Bae, Yeonsu Kwon, Woncheol Shin, Seongjun Yang, Min-joon Seo, Jong-Yeup Kim, and Edward Choi. Ehrsql: A practical text-to-sql benchmark for electronic health records. *Advances in Neural Information Processing Systems*, 35:15589–15601, 2022.
- Jinyang Li, Binyuan Hui, Ge Qu, Binhua Li, Jiayi Yang, Bowen Li, Bailin Wang, Bowen Qin, Rongyu Cao, Ruiying Geng, Nan Huo, Xuanhe Zhou, Chenhao Ma, Guoliang Li, Kevin Chen-Chuan Chang, Fei Huang, Reynold Cheng, and Yongbin Li. Can llm already serve as a database interface? a big bench for large-scale database grounded text-to-sqls. In *Advances in Neural Information Processing Systems*, volume 36, 2023.
- Xiao Liu, Hao Yu, Hanchen Zhang, Yifan Xu, Xuanyu Lei, Hanyu Lai, Yu Gu, Hangliang Ding, Kaiwen Men, Kejuan Yang, et al. Agentbench: Evaluating llms as agents. In *The Twelfth International Conference on Learning Representations*.
- Lucila Ohno-Machado. Realizing the full potential of electronic health records: the role of natural language processing. *Journal of the American Medical Informatics Association*, 18(5):539–539, 2011.
- Tom J Pollard, Alistair EW Johnson, Jesse D Raffa, Leo A Celi, Roger G Mark, and Omar Badawi. The eicu collaborative research database, a freely available multi-center database for critical care research. *Scientific data*, 5(1):1–13, 2018.
- Abhinav Rastogi, Xiaoxue Zang, Srinivas Sunkara, Raghav Gupta, and Pranav Khaitan. Towards scalable multi-domain conversational agents: The schema-guided dialogue dataset. In *Proceedings of the AAAI conference on artificial intelligence*, volume 34, pp. 8689–8696, 2020.
- Jaehye Ryu, Seonhee Cho, Gyubok Lee, and Edward Choi. Ehr-seqsql : A sequential text-to-sql dataset for interactively exploring electronic health records. In *Findings of the Association for Computational Linguistics: ACL 2024*, pp. 16388–16407, Bangkok, Thailand, 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.findings-acl.971. URL <https://aclanthology.org/2024.findings-acl.971/>.
- Irina Saporina and Mirella Lapata. Ambrosia: A benchmark for parsing ambiguous questions into database queries. *Advances in Neural Information Processing Systems*, 37:90600–90628, 2024.
- Ivan Sekulić, Silvia Terragni, Victor Guimarães, Nghia Khau, Bruna Guedes, Modestas Filipavicius, André Ferreira Manso, and Roland Mathis. Reliable llm-based user simulator for task-oriented dialogue systems. *arXiv preprint arXiv:2402.13374*, 2024.
- Jeonghoon Shim, Gyuhyeon Seo, Cheongsu Lim, and Yohan Jo. Tooldial: Multi-turn dialogue generation method for tool-augmented language models. In *The Thirteenth International Conference on Learning Representations*, 2025. URL <https://openreview.net/forum?id=J1J5eGJsKZ>.
- Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. *Advances in Neural Information Processing Systems*, 36:8634–8652, 2023.

- Bing Wang, Yan Gao, Zhoujun Li, and Jian-Guang Lou. Know what I don't know: Handling ambiguous and unknown questions for text-to-SQL. In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki (eds.), *Findings of the Association for Computational Linguistics: ACL 2023*, pp. 5701–5714, Toronto, Canada, July 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.findings-acl.352. URL <https://aclanthology.org/2023.findings-acl.352>.
- Ping Wang, Tian Shi, and Chandan K Reddy. Text-to-sql generation for question answering on electronic medical records. In *Proceedings of The Web Conference 2020*, pp. 350–361, 2020.
- xAI. Grok 3 beta — the age of reasoning agents. <https://x.ai/news/grok-3>, February 2025. Accessed: 2025-09-20.
- Ran Xu, Yuchen Zhuang, Yishan Zhong, Yue Yu, Xiangru Tang, Hang Wu, May D Wang, Peifeng Ruan, Donghan Yang, Tao Wang, et al. Medagentgym: Training llm agents for code-based medical reasoning at scale. *arXiv preprint arXiv:2506.04405*, 2025.
- Xi Yang, Aokun Chen, Nima PourNejatian, Hoo Chang Shin, Kaleb E Smith, Christopher Parisien, Colin Compas, Cheryl Martin, Anthony B Costa, Mona G Flores, et al. A large language model for electronic health records. *NPJ digital medicine*, 5(1):194, 2022.
- Shunyu Yao, Howard Chen, John Yang, and Karthik Narasimhan. Webshop: Towards scalable real-world web interaction with grounded language agents. *Advances in Neural Information Processing Systems*, 35:20744–20757, 2022.
- Shunyu Yao, Noah Shinn, Pedram Razavi, and Karthik Narasimhan. τ -bench: A benchmark for tool-agent-user interaction in real-world domains. In *The Twelfth International Conference on Learning Representations*, 2025.
- Tao Yu, Rui Zhang, Kai Yang, Michihiro Yasunaga, Dongxu Wang, Zifan Li, James Ma, Irene Li, Qingning Yao, Shanelle Roman, Zilin Zhang, and Dragomir Radev. Spider: A large-scale human-labeled dataset for complex and cross-domain semantic parsing and text-to-sql task. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pp. 3911–3921, Brussels, Belgium, 2018. Association for Computational Linguistics. doi: 10.18653/v1/D18-1425. URL <https://aclanthology.org/D18-1425/>.
- Tao Yu, Rui Zhang, Heyang Er, Suyi Li, Eric Xue, Bo Pang, Xi Victoria Lin, Yi Chern Tan, Tianze Shi, Zihan Li, Youxuan Jiang, Michihiro Yasunaga, Sungrok Shim, Tao Chen, Alexander Fabbri, Zifan Li, Luyao Chen, Yuwen Zhang, Shreya Dixit, Vincent Zhang, Caiming Xiong, Richard Socher, Walter Lasecki, and Dragomir Radev. CoSQL: A conversational text-to-SQL challenge towards cross-domain natural language interfaces to databases. In Kentaro Inui, Jing Jiang, Vincent Ng, and Xiaojun Wan (eds.), *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pp. 1962–1979, Hong Kong, China, November 2019a. Association for Computational Linguistics. doi: 10.18653/v1/D19-1204. URL <https://aclanthology.org/D19-1204/>.
- Tao Yu, Rui Zhang, Michihiro Yasunaga, Yi Chern Tan, Xi Victoria Lin, Suyi Li, Heyang Er, Irene Li, Bo Pang, Tao Chen, Emily Ji, Shreya Dixit, David Proctor, Sungrok Shim, Jonathan Kraft, Vincent Zhang, Caiming Xiong, Richard Socher, and Dragomir Radev. SPaRC: Cross-domain semantic parsing in context. In Anna Korhonen, David Traum, and Lluís Màrquez (eds.), *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 4511–4523, Florence, Italy, July 2019b. Association for Computational Linguistics. doi: 10.18653/v1/P19-1443. URL <https://aclanthology.org/P19-1443/>.
- Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric Xing, et al. Judging llm-as-a-judge with mt-bench and chatbot arena. *Advances in Neural Information Processing Systems*, 36:46595–46623, 2023.

SUPPLEMENTARY CONTENTS

A Benchmark Details	14
A.1 Sample Task Instances	14
A.1.1 IncreQA Sample	14
A.1.2 AdaptQA Sample	14
A.2 Tool Specifications	16
A.3 User Implementation	17
A.3.1 Simulated User	17
A.3.2 User System Prompt	17
A.3.3 Simulation Validator	18
A.4 Database-Specific Rules	19
A.4.1 MIMIC-IV★ Rules	19
A.4.2 eICU★ Rules	20
A.5 Evaluation Details	21
A.5.1 IncreQA	21
A.5.2 AdaptQA	21
B Annotation Details	22
B.1 SQL Annotation	22
B.2 EHR Database Preprocessing	23
B.2.1 MIMIC-IV Renaming	23
B.2.2 eICU Renaming	24
B.3 AdaptQA Templates	25
C Agent Implementation	26
C.1 Agent System Prompt	26
C.2 Agent Rules	26
C.3 Agent Rules for Evaluation	27
D Sample Trajectories	28
D.1 Incremental Query Refinement	28
D.1.1 Successful Case (IncreQA)	28
D.1.2 Failed Case (IncreQA)	32
D.2 Adaptive Query Refinement	38
D.2.1 Successful Case (AdaptQA)	38
D.2.2 Failed Case (AdaptQA)	43

A BENCHMARK DETAILS

A.1 SAMPLE TASK INSTANCES

In this section, we present sample task instances for IncreQA and AdaptQA.

A.1.1 INCREQA SAMPLE

```
{
  "task_id": "6",
  "task_type": "incre",
  "db_id": "mimic_iv_star",
  "instruction":
    "Your goal is to find the number of patients admitted to the hospital who meet
    specific criteria. Specifically, you want to know how many patients admitted in the
    past 90 days have a family history of breast cancer.",
  "gold_sql":
    "SELECT COUNT(DISTINCT ha.patientid) AS patient_count FROM hospitaladmissions
    ha JOIN admissiondiagnoses ad ON ha.admissionid = ad.admissionid JOIN
    diagnosis codes dc ON ad.icdcode = dc.icdcode AND ad.codeversion = dc.
    codeversion WHERE dc.description = 'family history of malignant neoplasm of
    breast' AND datetime(ha.admitdatetime) >= datetime('2100-12-31 23:59:00', '-90
    days')",
  "gold_answer": [[1]]
}
```

A.1.2 ADAPTQA SAMPLE

```
{
  "task_id": "10",
  "task_type": "adapt",
  "db_id": "mimic_iv_star",
  "instruction":
    "Your goal is to explore patient data related to medication prescriptions.
    Specifically, you are interested in patient ID 10008287 and want to know when they
    were prescribed carbamazepine for epilepsy treatment. If the patient was
    prescribed carbamazepine, you want to know the most recent prescription time
    after the first epilepsy diagnosis. If the patient was not prescribed carbamazepine,
    you want to identify whether any other class of medication used for epilepsy
    treatment was prescribed. If such medications are found, you want to know the
    most recent prescription time after the first epilepsy diagnosis. If no such
    medications are found, end the conversation. You want the answer in the exact
    time format recorded in the database.",
}
```

"gold.sql":

```
"WITH valid_epilepsy_codes AS ( SELECT DISTINCT d.icdcode, d.codeversion, di.
description FROM admissiondiagnoses d JOIN diagnosisicodes di ON d.icdcode = di.
icdcode AND d.codeversion = di.codeversion WHERE di.description LIKE '%epilepsy
%' ), epilepsy_diagnoses AS ( SELECT d.patientid, d.admissionid, MIN(d.
recordeddatetime) AS first_epilepsy_time FROM admissiondiagnoses d JOIN
valid_epilepsy_codes c ON d.icdcode = c.icdcode AND d.codeversion = c.codeversion
WHERE d.patientid = 10008287 GROUP BY d.patientid, d.admissionid ),
carbamazepine_prescriptions AS ( SELECT p.patientid, p.admissionid, p.
startdatetime FROM medicationorders p JOIN epilepsy_diagnoses ed ON p.patientid
= ed.patientid AND p.admissionid = ed.admissionid WHERE p.medicationname = '
carbamazepine' AND p.startdatetime > ed.first_epilepsy_time ),
alternative_epilepsy_prescriptions AS ( SELECT p.patientid, p.admissionid, p.
startdatetime FROM medicationorders p JOIN epilepsy_diagnoses ed ON p.patientid
= ed.patientid AND p.admissionid = ed.admissionid WHERE p.medicationname IN ( '
levetiracetam', 'phenytoin', 'valproate', 'lamotrigine', 'topiramate' ) AND p.
startdatetime > ed.first_epilepsy_time ), combined_prescriptions AS ( SELECT
patientid, admissionid, startdatetime FROM carbamazepine_prescriptions WHERE
EXISTS (SELECT 1 FROM carbamazepine_prescriptions) UNION ALL SELECT patientid,
admissionid, startdatetime FROM alternative_epilepsy_prescriptions WHERE NOT
EXISTS (SELECT 1 FROM carbamazepine_prescriptions) ) SELECT startdatetime FROM
combined_prescriptions ORDER BY startdatetime DESC LIMIT 1;"
```

"gold.answer": [['2100-10-12 20:00:00']]

}

A.2 TOOL SPECIFICATIONS

Table 4 presents the six default tools, categorized by their purposes. These tools serve as channels for access to database content and external clinical knowledge to solve question-answering tasks in EHR-ChatQA. For each tool, the equals sign (=) denotes its default arguments.

Table 4: Definition of six default tools provided in EHR-ChatQA.

Tool name	Input	Output	Description
<i>Schema exploration</i>			
table_search	None	List of tables	Lists all available tables in the database.
column_search	Table name	Column names with 3 sample rows	Shows the columns of a specified table along with sample data.
<i>Value exploration</i>			
value_substring_search	Table name, column name, value, k=10	k values containing the substring	Finds values that contain the specified substring in the given column.
value_similarity_search	Table name, column name, value, k=10	k similar values	Finds values similar to the input value based on semantic similarity*.
<i>External knowledge retrieval</i>			
web_search	Keyword	Web search results	Retrieves relevant external clinical knowledge from the web.
<i>SQL execution</i>			
sql_execute	SQL query, k=100	SQL result	Executes the provided SQL query and returns up to k results.

*For value_similarity_search, we use FAISS wrapped in the LangChain library. Text columns frequently used in QA tasks are pre-indexed, as listed below (table names with their corresponding column names in brackets).

For MIMIC-IV*, the pre-indexed columns include:

- hospitaladmissions: [admissiontype, admitsource, dischargedestination]
- diagnosiscodes: [description]
- procedurecodes: [description]
- medicationorders: [medicationname]
- clinicalitemtypes: [itemname]
- labtesttypes: [itemname]
- microbiologyresults: [specimentype, testname, organismname]

For eICU*, the pre-indexed columns include:

- allergy_reaction: [drug_name, allergy_name]
- condition: [condition_name]
- fluid_balance: [fluid_label]
- lab: [lab_name]
- prescription: [drug_name]
- icupatient: [ethnicity, hospital_admission_source]
- treatment: [treatment_name]

A.3 USER IMPLEMENTATION

A.3.1 SIMULATED USER

For the implementation of simulated users, we use Gemini-2.0-Flash due to its low cost and effective instruction-following capabilities. To simulate user stochasticity in natural language utterances, the temperature of the user simulator is set to 1.0. Table 5 shows the system prompt for the user simulator.

A.3.2 USER SYSTEM PROMPT

Table 5: User system prompt.

Your task is to simulate a user with no knowledge of SQL or database management systems, who needs specific information from an EHR database and relies on the DB agent for help.

Instruction: {user_instruction}

Rules:

- The current time is 2100-12-31 23:59:00.
- Start with a short, broad question that reflects the overall goals from the instruction.
- Use your own words to describe your goals for the DB agent.
- Do not reveal all your goals at once. Instead, share them gradually, one or two sentences at a time.
- Speak casually and directly, without functionally unnecessary phrases (like "please" or "thank you") that make the tone sound like an AI assistant.
- Do not generate SQL, code snippets, empty messages, or AI-assistant-like outputs. Stay in the role of a user, not a DB agent.
- If the DB agent requests specific tables or column names, instruct it to locate them independently (unless the instruction says otherwise).
- If the DB agent requests writing or reviewing SQL queries, or summarizing the overall goal, instruct it to complete the task independently.
- If the DB agent gives an intermediate answer, don't complete it yourself. Instead, instruct it to finalize it (e.g., performing calculations like time differences or rephrasing answers).
- If the DB agent's answer seems satisfactory (even though you do not know whether it is correct or whether the requested data actually exists) generate only "###END###" to end the conversation. Do not add it after every reply. Use it only once in the final message.
- Do not deviate from what is specified in the instruction, such as failing to mention the top N ranked tied results to retrieve, requesting medication order records or prescription records instead of administered records, requesting 6 months of data instead of 180 days, asking follow-up questions when they are not specified in the instruction, or revealing disallowed information before the DB agent mentions it.

A.3.3 SIMULATION VALIDATOR

Tables 6 and 7 show the system and input prompts used by the simulation validator. If the validator outputs “user_error” instead of “no_error,” the conversation is flagged and the simulation is re-run.

Table 6: System prompt for the simulation validator.

Your task is to determine whether [USER] accurately followed the provided rules and user instruction during their conversation with [DB AGENT]. Errors are defined as any deviations from the rules or user instruction. You must carefully review the rules, user instruction, conversation between [USER] and [DB AGENT], and the gold SQL query to identify any errors made by [USER].

Table 7: Input prompt for the simulation validator.

```
{user_system_prompt}
```

```
Conversation:
{conversation}
```

```
Gold SQL:
{gold_sql}
```

Types of common user errors:

- The user gives away their goals all at once in the same turn.
- The user acts like a DB agent or AI assistant instead of the user (e.g., writing, reviewing, or executing SQL queries, calling external APIs, or responding to the DB agent in a machine assistant way).
- The user asks for information that is slightly different from what is specified in the instruction (e.g., requesting medication order records or prescription records instead of administered records, or requesting 6 months of data instead of 180 days).
- The user confirms values that differ from those in the gold SQL, unless specified otherwise in the instruction (e.g., requesting data for just "diabetes" when the gold SQL uses LIKE "%diabetes%").
- The user mentions information beyond the instruction, including related or unrelated details not specified (e.g., asking follow-up questions not in the instruction).
- The user must provide all detailed conditions specified in the instruction before ending the conversation. These conditions may include, for example, retrieving all tied ranked results, specifying the top "N" results to retrieve, handling duplicate patient records, or indicating keywords to include or exclude when searching for data. However, if the DB agent retrieves no relevant data, these conditions are not required.
- The user violates any other rules specified in the rules or the user instruction.

You must respond in JSON format with the following fields:

- explanation: Provide a clear and concise explanation of why you made the decision.
- broken_rule: If a user error is found, provide the exact rule or instruction that the user violated. If no error is found, provide an empty string.
- evidence: If a user error is found, provide the exact user response that caused the error. If no error is found, provide an empty string.
- result: Answer "user_error" if a user error is found. Answer "no_error" if no user error is found.

A.4 DATABASE-SPECIFIC RULES

Database-specific rules guide the agent in referencing database contents and generating SQL queries. These rules complement the general agent rules (Section C.1), covering time-related operations, database-specific schema structures (e.g., the hierarchy linking patient records to admission records, and admission records to ICU records), and hints for complex numerical operations, such as survival rate calculations. The complete database-specific rules are detailed in Sections A.4.1 and A.4.2.

A.4.1 MIMIC-IV* RULES

Table 8: SQL assumptions for MIMIC-IV*.

Below are the SQL generation rules:

- Use SQLite for SQL query generation.
- The current time is '2100-12-31 23:59:00'. When referring to time, do not use SQLite's native functions like now. Instead, use '2100-12-31 23:59:00' for 'now', '2100-12-31' for 'today', '2100-12' for 'this month', and '2100' for 'this year'.
- Use DENSE_RANK() for questions involving ranked results (e.g., the most or the top N most common/frequent events) to retrieve values from the specified column (e.g., diagnosis names). Exclude counts or ranks unless the user explicitly requests them. Do not use DENSE_RANK() for questions without ranked result requests.
- For cost-related questions, use costrecords.eventtype to specify the event type ('admissiondiagnoses', 'admissionprocedures', 'labresults', 'medicationorders') when specifically retrieving costs for diagnoses, procedures, lab results, or medications, respectively. When retrieving costs for diagnoses, join costrecords.costid with admissiondiagnoses.recordid. For procedures, join with admissionprocedures.recordid. For lab results, join with labresults.recordid. For medications, join with medicationorders.recordid.
- The medicationorders table stores ordered or prescribed medications, while the intakerecords table records administered drugs or fluids
- When asked to retrieve procedures, diagnoses, or lab tests, return their names instead of their codes.
- All values stored in the database are in lowercase.
- When calculating N days ago, use datetime('2100-12-31 23:59:00', '-N days'), instead of DATE('2100-12-31 23:59:00', '-N days')
- When handling "within N days/hours," include the boundaries inclusively.
- For questions involving the timing of diagnoses or conditions relative to other events, you must use the first diagnosis time for each patient unless directed otherwise.
- When searching for specific medication names in the database, use a pattern like %morphine% instead of exact matches like morphine unless directed otherwise.
- As clinical and lab events often share identical names but have different codes (e.g., codes 50902 and 52535 both represent chloride), use the names if grouping them in SQL.
- If the results contain numerical values (e.g., time differences in days or hours, or survival rates), round them to four decimal places.

A.4.2 EICU★ RULES

Table 9: SQL assumptions for eICU★.

Below are the SQL generation rules:

- Use SQLite for SQL query generation.
- The current time is '2100-12-31 23:59:00'. When referring to time, do not use SQLite's native functions like now. Instead, use '2100-12-31 23:59:00' for 'now', '2100-12-31' for 'today', '2100-12' for 'this month', and '2100' for 'this year'.
- Use DENSE_RANK() for questions involving ranked results (e.g., the most or the top N most common/frequent events) to retrieve values from the specified column (e.g., diagnosis names). Exclude counts or ranks unless the user explicitly requests them. Do not use DENSE_RANK() for questions without ranked result requests.
- The patient identifiers patient_id, hosp_id, and unit_id represent the unique patient ID, hospital admission ID, and ICU admission ID, respectively. The hierarchy of them is patient -> hospital -> icu.
- When retrieving specific hospital or ICU admission records, use their admission IDs rather than admission or discharge times.
- For cost-related questions, use cost.event_type to specify the event type ('condition', 'treatment', 'lab', 'prescription') when specifically retrieving costs for conditions, treatments, lab results, or prescriptions, respectively. For example, when retrieving costs for conditions, join cost.event_id with condition.condition_id with event_type = 'condition'.
- Use fluid_balance for both input and output events. Specify input events using fluid_balance.fluid_path LIKE '%intake%' and output events using fluid_balance.fluid_path LIKE '%output%'.
- The prescription table stores ordered or prescribed medications, while the fluid_balance table records administered drugs or fluids when fluid_balance.fluid_path LIKE '%intake%'.
- All values stored in the database are in lowercase.
- Patients with no records of death are considered to have survived when dealing with death-related questions.
- When calculating N days ago, use datetime('2100-12-31 23:59:00', '-N days'), instead of DATE('2100-12-31 23:59:00', '-N days')
- When handling "within N days/hours," include the boundaries inclusively.
- For questions involving the timing of diagnoses or conditions relative to other events, you must use the first diagnosis time for each patient unless directed otherwise.
- When searching for specific medication names in the database, use a pattern like %morphine% instead of exact matches like morphine unless directed otherwise.
- If the results contain numerical values (e.g., time differences in days or hours, or survival rates), round them to four decimal places.

A.5 EVALUATION DETAILS

The evaluation methods for IncreQA and AdaptQA differ, and the appropriate method is applied based on the interaction flow type.

A.5.1 INCREQA

For IncreQA tasks, we evaluate the agent by executing the SQL query it generates (parsed from the input to the `sql_execute` tool). We compare the resulting output to the ground-truth SQL output to ensure accuracy even for queries that return many rows. Up to 100 results are checked.

A.5.2 ADAPTQA

For AdaptQA tasks, correctness is evaluated based on the content within the `<answer></answer>` tags of the agent’s final response to the user. This method is better suited for tasks that require clinical reasoning beyond simple SQL retrieval. For instance, after retrieving medication data, the agent might need to identify drugs within the same class or those with similar purposes but different mechanisms. For tasks requiring numerical answers (e.g., patient counts), the instructions explicitly ask the agent to respond in words rather than numerals (e.g., “twenty” instead of “20”). This avoids false positives from numeral-word mismatches during evaluation.

B ANNOTATION DETAILS

B.1 SQL ANNOTATION

SQL annotations in EHR-ChatQA use Common Table Expressions (CTEs) to enhance readability and maintainability. A sample user instruction and its corresponding gold SQL query are shown in Table 10.

Table 10: Sample user instruction and its ground-truth SQL query.

User Instruction	Gold SQL
Your goal is to find information related to a specific patient’s lab tests. Specifically, you are interested in patient ID 10018845 and want to know all timestamps when the Hb value was 8 or lower during the patient’s last hospital visit. You want to search for Hb specifically, not other similar lab tests like “Hb C” or “Hb A2.” When querying the DB agent, since you do not know how Hb is stored, use common terms like “Hb” or “Hgb” when referring to it, and let the DB agent find it for you.	<pre> WITH LastAdmission AS (SELECT admissionid FROM hospitaladmissions WHERE patientid = 10018845 ORDER BY admitdatetime DESC LIMIT 1), HbTest AS (SELECT itemcode FROM labtesttypes WHERE itemname = 'hemoglobin') SELECT lr.resultdatetime FROM labresults lr JOIN LastAdmission la ON lr.admissionid = la.admissionid JOIN HbTest ht ON lr.itemcode = ht.itemcode WHERE lr.patientid = 10018845 AND lr.resultvalue <= 8 AND lr.resultvalue IS NOT NULL ORDER BY lr.resultdatetime; </pre>

B.2 EHR DATABASE PREPROCESSING

Our preliminary analysis revealed that many LLMs memorize the original MIMIC-IV and eICU schemas, which leads to SQL generation without actual schema exploration. To prevent this, we rename the schema so that generating SQL without using the provided schema tools inevitably results in errors. The detailed schema mappings are provided in Table 11 and Table 12.

B.2.1 MIMIC-IV RENAMING

Table 11: Table and column renaming mappings for MIMIC-IV.

Original Table	Mapped Table	Column Mappings (MIMIC-IV to MIMIC-IV*)
patients	demographics	row_id → recordid, subject_id → patientid, gender → gender, dob → dateofbirth, dod → dateofdeath
admissions	hospitaladmissions	row_id → recordid, subject_id → patientid, hadm_id → admissionid, admit_time → admitdatetime, dischtime → dischargedatetime, admission_type → admissiontype, admission_location → admitsource, discharge_location → dischargedestination, insurance → insurancetype, language → language, marital_status → maritalstatus, age → age
d_icd_diagnoses	diagnosiscodes	row_id → recordid, icd_code → icdcode, icd_version → codeversion, long_title → description
d_icd_procedures	procedurecodes	row_id → recordid, icd_code → icdcode, icd_version → codeversion, long_title → description
d_labitems	labtesttypes	row_id → recordid, itemid → itemcode, label → itemname
d_items	clinicalitemtypes	row_id → recordid, itemid → itemcode, label → itemname, abbreviation → abbreviation, linksto → itemtype
diagnoses_icd	admissiondiagnoses	row_id → recordid, subject_id → patientid, hadm_id → admissionid, icd_code → icdcode, icd_version → codeversion, charttime → recordeddatetime
procedures_icd	admissionprocedures	row_id → recordid, subject_id → patientid, hadm_id → admissionid, icd_code → icdcode, icd_version → codeversion, charttime → recordeddatetime
labevents	labresults	row_id → recordid, subject_id → patientid, hadm_id → admissionid, itemid → itemcode, charttime → resultdatetime, valenum → resultvalue, valueuom → resultunit
prescriptions	medicationorders	row_id → recordid, subject_id → patientid, hadm_id → admissionid, start_time → startdatetime, stop_time → enddatetime, drug → medicationname, dose_val_rx → dosevalue, dose_unit_rx → doseunit, route → administrationroute
cost	costrecords	row_id → recordid, subject_id → patientid, hadm_id → admissionid, event_type → eventtype, event_id → costid, chargetime → costdatetime, cost → costamount
charevents	clinicalevents	row_id → recordid, subject_id → patientid, hadm_id → admissionid, stay_id → icuadmissionid, itemid → itemcode, charttime → recordeddatetime, valenum → value, valueuom → unit
inputevents	intakerecords	row_id → recordid, subject_id → patientid, hadm_id → admissionid, stay_id → icuadmissionid, starttime → startdatetime, itemid → itemcode, totalamount → totalvolume, totalamountuom → volumeunit
outputevents	outputrecords	row_id → recordid, subject_id → patientid, hadm_id → admissionid, stay_id → icuadmissionid, charttime → recordeddatetime, itemid → itemcode, value → volume, valueuom → volumeunit
microbiologyevents	microbiologyresults	row_id → recordid, subject_id → patientid, hadm_id → admissionid, charttime → collecteddatetime, spec_type_desc → specimenstype, test_name → testname, org_name → organismname
icustays	icuepisodes	row_id → recordid, subject_id → patientid, hadm_id → admissionid, stay_id → icuadmissionid, first_careunit → initialcareunit, last_careunit → finalcareunit, intime → admitdatetime, outtime → dischargedatetime
transfers	patienttransfers	row_id → recordid, subject_id → patientid, hadm_id → admissionid, transfer_id → transferid, eventtype → transfertype, careunit → careunit, intime → transferindatetime, outtime → transferoutdatetime

B.2.2 EICU RENAMING

Table 12: Table and column renaming mappings for eICU.

Original Table	Mapped Table	Column Mappings (eICU to eICU*)
patient	person	uniquepid → person_id, patienthealthsystemstayid → hosp_id, patientunitstayid → unit_id, gender → gender, age → age, ethnicity → ethnicity, hospitalid → hospital_id, wardid → ward_id, admissionheight → height_admission, admissionweight → weight_admission, dischargeweight → weight_discharge, hospitaladmittime → hospital_admit_time, hospitaladmitsource → hospital_admission_source, unitadmittime → unit_admit_time, unitdischarge_time → unit_discharge_time, hospitaldischarge_time → hospital_discharge_time, hospitaldischargestatus → hospital_discharge_status
diagnosis	condition	diagnosisid → condition_id, patientunitstayid → unit_id, diagnosisname → condition_name, diagnosistime → condition_time, icd9code → icd9_code
treatment	treatment	treatmentid → treatment_id, patientunitstayid → unit_id, treatmentname → treatment_name, treatmenttime → treatment_time
lab	lab	labid → lab_id, patientunitstayid → unit_id, labname → lab_name, labresult → lab_result, labresulttime → lab_result_time
medication	prescription	medicationid → prescription_id, patientunitstayid → unit_id, drugname → drug_name, dosage → dosage, routeadmin → administration_route, drugstart_time → medication_start_time, drugstop_time → medication_stop_time
cost	cost	costid → cost_id, patienthealthsystemstayid → hosp_id, patientunitstayid → unit_id, eventtype → event_type, eventid → event_id, charge_time → cost_time, cost → cost_amount
allergy	allergy_reaction	allergyid → allergy_id, patientunitstayid → unit_id, drugname → drug_name, allergyname → allergy_name, allergytime → allergy_time
intakeoutput	fluid_balance	intakeoutputid → fluid_balance_id, patientunitstayid → unit_id, cellpath → fluid_path, celllabel → fluid_label, cellvaluenumeric → fluid_value_numeric, intakeoutputtime → fluid_balance_time
microlab	microbiology	microlabid → microbiology_id, patientunitstayid → unit_id, culturesite → culture_site, organism → organism, culturetaken_time → culture_taken_time
vitalperiodic	vital_signs	vitalperiodicid → vital_sign_id, patientunitstayid → unit_id, temperature → temperature, sao2 → sao2, heartrate → heart_rate, respiration → respiration_rate, systemicsystolic → systolic_bp, systemicdiastolic → diastolic_bp, systemicmean → mean_bp, observationtime → vital_time
hospital	hospital	hospitalid → hospital_id, numbedscategory → bed_capacity_category, teachingstatus → teaching_status, region → region

B.3 ADAPTQA TEMPLATES

Table 13: Eight categories of query goal modification in AdaptQA.

Category	Description
Medication nomenclature traversal	This category involves queries that navigate the medication nomenclature, such as from a brand name to a generic name or vice versa. The tasks begin by requesting information about a specific medication name (e.g., "Lipitor") and then, if that name is not found, adapt the query to search for its generic name, active ingredient, or other brand names within the same class.
Within drug class adaptation	This category encompasses queries that require a user to adapt their search within a single drug class. The query goals might be to expand from a specific drug to the entire class, narrow the search from a broad class to a specific subclass, or exclude a particular medication from a class. This flexibility demonstrates a deeper understanding of therapeutic classifications beyond simple name-to-name conversion.
Across drug class traversal	This category is defined by queries that involve navigating between different drug classes. The tasks may require the identification of medications from one class while excluding another (e.g., finding PUD medications other than PPIs) or the combination of multiple distinct drug classes in a single query (e.g., patients prescribed both ACE inhibitors and Beta-blockers).
Primary condition to related condition	This category includes tasks where the initial query focuses on a primary diagnosis or procedure, and the subsequent goal is to identify clinically related conditions. This often involves looking for common comorbidities, complications from a surgery, or side effects of a medication.
Alternative lab test for condition	This category is designed for scenarios where the initial query for a specific lab test is unsuccessful. The system must then identify and pivot to a clinically relevant alternative lab test used to assess the same condition (e.g., from "troponin I" to "troponin T" for myocardial damage). This mimics clinical reasoning when a preferred test is unavailable.
Alternative procedure for treatment	This category handles tasks that require finding alternative procedures when a primary treatment method is not found or is not applicable. The queries start by searching for a specific procedure for a condition and then, if necessary, adjust to look for other clinically appropriate procedures or surgeries for the same condition.
Multi-criteria resolution	This category involves complex queries that require resolving multiple, often compound, criteria simultaneously. The tasks integrate various data points—such as diagnoses, lab results, and vital signs—using logical operators (AND/OR) to identify a specific patient cohort. The complexity lies in accurately interpreting and executing these intricate, rule-based queries.
Schema fallback handling	This category addresses situations where the primary data source (a specific database table or schema) is unavailable. The query system must then "fall back" to an alternative data source or a modified search strategy to fulfill the user's goal. This demonstrates robustness in handling missing data schema by adapting the query to existing information (e.g., a "cancer registry table" vs. the general "diagnosis table").

C AGENT IMPLEMENTATION

For selecting the backbone LLMs for the agents, small models (e.g., 7B or 13B), DeepSeek-R1, and the Gemma 3 series are excluded due to their limited performance in tool invocation tasks. Owing to budget constraints, we also exclude Anthropic models (e.g., Opus 4 and Sonnet) as well as Gemini-2.5-Pro.

Table 14 presents the system prompt used for our agent baselines. In addition to the system prompt, the agent’s input includes three other components: (1) agent behavioral rules detailing interaction behavior (Section C.2); (2) evaluation rules for IncreQA and AdaptQA to ensure accurate evaluation (Section A.5); and (3) database-specific rules outlining the SQL annotation assumptions for MIMIC-IV* and eICU* (Section A.4).

C.1 AGENT SYSTEM PROMPT

Table 14: Agent system prompt.

```

Instruction:
- You are a DB agent that helps users by answering their questions
  in natural language using information from a database.
- You are currently engaged in a conversation with a user who wants
  to retrieve some data or statistics from an EHR database.
- If the user’s request is ambiguous or lacks important details (e.g
  ., filtering criteria), ask clarifying questions to better
  understand the request.
- You have access to a set of tools to assist the user:
  - table_search: search tables in the database
  - column_search: search columns in a table
  - value_substring_search: search values in a column by substring
    match
  - value_similarity_search: search values in a column by semantic
    similarity (embedding-based)
  - sql_execute: execute an SQL query on the database
  - web_search: search the web for external clinical knowledge
- Use table_search and column_search to explore the database schema.
- Use value_substring_search and value_similarity_search to explore
  stored values.
- Clinical concepts (e.g., diagnoses, procedures, medications, lab
  tests) in the database may not exactly match the user’s words. Use
  the value search tools to find relevant entries.
- If you need clinical knowledge beyond what is in the database (e.g
  ., a drug’s mechanism of action), use web_search.
- Never invent or assume information that is not provided by the
  user or retrieved using the tools.
- Make only one tool call at a time. Do not send a user-facing
  response in the same turn as a tool call.
- After gathering all necessary information, use sql_execute to
  write and run a single valid SQL query that fully answers the user’s
  latest request.
- When you write an SQL query, always execute it with sql_execute
  and return the results to the user along with your explanation.

{agent_rule}

{database_rule}

```

C.2 AGENT RULES

Table 15: Agent rules.

```

Below are the general rules for the DB agent:
- The DB agent must assume the user has no knowledge of SQL,
  databases, or stored values, and cannot execute queries.

```

- The DB agent must interact with the user only in natural language and must not show raw SQL queries.
- The DB agent must not modify the database schema or contents. The following commands are forbidden: INSERT, UPDATE, DELETE, DROP, ALTER.
- The DB agent must write queries that finish within 60 seconds; otherwise, the query results will be invalid.
- The DB agent must limit each conversation to 30 interactions (including user exchanges and tool calls) and 600 seconds total.
- The DB agent must always explain answers in natural language, including the reasoning or conditions used to arrive at those answers. If SQL references are necessary, the DB agent must explain them in terms understandable to someone with no SQL knowledge.
- The DB agent must clearly explain when a question cannot be answered (e.g., due to limitations of SQL or empty results) and ask the user to rephrase or modify the request.

C.3 AGENT RULES FOR EVALUATION

Table 16 and Table 17 present the prompts used for IncreQA and AdaptQA tasks, respectively. These prompts are appended to the agent rules to guide the agent toward behavior that aligns with accurate evaluation criteria. Note that for both task types, the agent’s responses are evaluated each time they are generated, as correct answers may emerge during the conversation due to iterative nature of open QA dialogues.

Table 16: Scoring rules for IncreQA.

Below are the grading rules:

- The DB agent’s performance is evaluated based on the generated SQL queries, requiring at least one SQL query (via `sql_execute`) to retrieve answers during the interaction with the database.
- For accurate assessment, when the user revises their question, the DB agent must write a new SQL query from scratch to fully address the latest request, without relying on previous query results.
- For questions that involve calculations (such as time differences or survival rates) or data manipulation/aggregation, the DB agent must use SQL language to compute the results rather than relying on its LLM capabilities.

Table 17: Scoring rules for AdaptQA.

Below are the grading rules:

- The DB agent’s performance is evaluated based on the results in its natural language response to the user.
- When providing answers to the user, the DB agent must enclose the final answer in `<answer></answer>` tags (e.g., `<answer>42</answer>`). All other content, including intermediate results, explanations, value units, and any additional details, must be placed outside these tags.
- When answers are textual data (e.g., timestamps or diagnosis names), use them exactly as stored in the database. For numerical answers, round them to four decimal places.

D SAMPLE TRAJECTORIES

In this section, we present sample task instances along with one successful and one failed conversation trajectory for IncreQA and AdaptQA.

D.1 INCREMENTAL QUERY REFINEMENT

D.1.1 SUCCESSFUL CASE (INCREQA)

The agent successfully retrieves the number of patients diagnosed with breast cancer by querying values in the description column of the diagnosiscodes table.

User: I'm trying to figure out how many patients admitted to the hospital have certain conditions.

Agent: `table_search(arguments={"tool_input":""})`

Tool: admissiondiagnoses, admissionprocedures, cliniquevents, clinicalitemtypes, costrecords, demographics, diagnosiscodes, hospitaladmissions, icuepisodes, intake records, labresults, labtesttypes, medicationorders, microbiologyresults, outputrecords, patienttransfers, procedurecodes

Agent: `column_search(arguments={"table_names":"admissiondiagnoses,diagnosiscodes"})`

Tool: CREATE TABLE admissiondiagnoses (
 recordid INTEGER NOT NULL,
 patientid INTEGER NOT NULL,
 admissionid INTEGER NOT NULL,
 icdcode TEXT NOT NULL,
 codeversion INTEGER NOT NULL,
 recordeddatetime TEXT NOT NULL,
 PRIMARY KEY (recordid),
 FOREIGN KEY (codeversion) REFERENCES diagnosiscodes (codeversion),
 FOREIGN KEY (icdcode) REFERENCES diagnosiscodes (icdcode),
 FOREIGN KEY (admissionid) REFERENCES hospitaladmissions (admissionid)
)

/*

3 rows from admissiondiagnoses table:

recordid patientid admissionid icdcode codeversion recordeddatetime

0 10035185 22580999 4139 9 2100-05-17 12:53:00

1 10035185 22580999 v707 9 2100-05-17 12:53:00

2 10035185 22580999 41401 9 2100-05-17 12:53:00

*/

CREATE TABLE diagnosiscodes (
 recordid INTEGER NOT NULL,

```
        icdcode TEXT NOT NULL,  
        codeversion INTEGER NOT NULL,  
        description TEXT NOT NULL,  
        PRIMARY KEY (recordid)  
    )  
    /*  
    3 rows from diagnosiscodes table:  
    recordid icdcode codeversion description  
    0 0090 9 infectious colitis, enteritis, and gastroenteritis  
    1 01160 9 tuberculous pneumonia [any form], unspecified  
    2 01186 9 other specified pulmonary tuberculosis, tubercle bacilli not found by  
    bacteriological or histological examination, but tuberculosis confirmed by other methods [  
    inoculation of animals]  
    */
```

Agent: Could you clarify which specific conditions you'd like to count? For example, are you interested in diabetes, heart failure, COPD, etc.? Also, should these diagnoses be those recorded at the time of hospital admission?

User: I want to know how many patients admitted in the last 90 days have a family history of breast cancer.

Agent: `value_substring_search(arguments={"table":"diagnosiscodes","column":"description","value":"family"})`

Tool: Values in `diagnosiscodes.description` containing 'family': ['family history of polycystic kidney', 'non-family member, perpetrator of maltreatment and neglect', 'family history of unspecified malignant neoplasm', ..., 'family history of eye disorders', 'family disruption due to death of family member'].

Agent: `column_search(arguments={"table_names":"hospitaladmissions"})`

Tool: `CREATE TABLE hospitaladmissions (
 recordid INTEGER NOT NULL,
 patientid INTEGER NOT NULL,
 admissionid INTEGER NOT NULL,
 admitdatetime TEXT NOT NULL,
 dischargedatetime TEXT,
 admissiontype TEXT NOT NULL,
 admitsource TEXT NOT NULL,
 dischargedestination TEXT,
 insurancetype TEXT NOT NULL,`

```

        language TEXT,
        maritalstatus TEXT,
        age INTEGER NOT NULL,
        PRIMARY KEY (recordid),
        FOREIGN KEY (patientid) REFERENCES demographics (patientid)
    )
/*
3 rows from hospitaladmissions table:
recordid patientid admissionid admitdatetime dischargedatetime admissiontype
admitsource dischargedestination insurancetype language maritalstatus age
0 10004235 24181354 2100-03-19 14:38:00 2100-03-28 14:02:00 urgent transfer from hospital
skilled nursing facility medicaid english single 47
1 10009628 25926192 2100-09-30 17:08:00 2100-10-08 13:20:00 urgent transfer from
hospital home health care medicaid ? married 58
2 10006053 22942076 2100-11-15 23:39:00 2100-11-17 17:20:00 urgent transfer from hospital
died medicaid english None 52
*/

```

Agent: value_substring_search(arguments={"table":"diagnosiscodes","column":"description","value":"breast"})

Tool: Values in diagnosiscodes.description containing 'breast': ['other and unspecified disorder of breast associated with childbirth, postpartum condition or complication', 'malignant neoplasm of axillary tail of female breast', 'full-thickness skin loss [third degree, not otherwise specified] of chest wall, excluding breast and nipple', ..., 'personal history of malignant neoplasm of breast', 'open wound of breast, without mention of complication'].

Agent: sql.execute(arguments={"query": "SELECT COUNT(DISTINCT ha.patientid) AS num_patients FROM hospitaladmissions AS ha JOIN admissiondiagnoses AS ad ON ha.admissionid = ad.admissionid JOIN diagnosiscodes AS dc ON ad.icdcode = dc.icdcode AND ad.codeversion = dc.codeversion WHERE dc.description = 'family history of malignant neoplasm of breast' AND ha.admitdatetime >= datetime('2100-12-31 23:59:00', '-90 days') ;"})

Tool: [(1,)]

Agent: There have been 1 unique patient admitted in the last 90 days with a diagnosis of family history of malignant neoplasm of breast.

User: Can you double check that the answer covers my goals?

Agent: Yes—here's how the query addresses each part of your goal:

- Last 90 days: We filtered admissions with
`ha.admitdatetime >= datetime('2100-12-31 23:59:00', '-90 days')`
 - Family history of breast cancer: We joined admissions -> diagnoses -> codes and used
`dc.description = 'family history of malignant neoplasm of breast'`
 - Unique patients: We counted `DISTINCT ha.patientid` so repeat admissions aren't double-counted.
- The result was 1 patient. Let me know if you'd like any further breakdown or checks!

User: ###END###

D.1.2 FAILED CASE (INCREQA)

The agent fails to retrieve information on breast cancer, as it queries unrelated tables and columns (e.g., `clinicalevents` and `clinicalitemtypes`) instead of the `diagnosis` table. Due to the use of FAISS, wrapped in the LangChain library, values with semantic similarity below the default threshold (0.8) are not retrieved. Consequently, values below this threshold are not retrieved. In the example below, the agent applies the value similarity tool to the `itemname` column of the `clinicalitemtypes` table for “cancer,” but the tool returns no result. Note that `itemname` corresponds to the label in the `d_item` table in MIMIC-IV, which covers a wide range of clinical practices, vital signs, and measurements.

User: I want to find out how many patients have been admitted to the hospital recently and also have a family history of breast cancer.

Agent: To assist you with your request, I need to clarify a couple of things:

1. What do you mean by “recently”? Are you looking for admissions within a specific time frame (e.g., the last month, last year)?

2. How is the family history of breast cancer recorded in the database? Is there a specific table or column that indicates this information?

Once I have this information, I can proceed to gather the necessary data from the database .

User: I’m interested in patients admitted in the last 90 days. As for the family history, could you check the database to find where that info is stored?

Agent: `table_search(arguments={"tool_input":""})`

Tool: `admissiondiagnoses, admissionprocedures, cliniquevents, clinicalitemtypes, costrecords, demographics, diagnosis, hospitaladmissions, icuepisodes, intake, labresults, labtesttypes, medicationorders, microbiologyresults, outputrecords, patienttransfers, procedurecodes`

Agent: `table_names(arguments={"table_names":"demographics"})`

Tool: `CREATE TABLE demographics (
 recordid INTEGER NOT NULL,
 patientid INTEGER NOT NULL,
 gender TEXT NOT NULL,
 dateofbirth TEXT NOT NULL,
 dateofdeath TEXT,
 PRIMARY KEY (recordid)
)
/*
3 rows from demographics table:
recordid patientid gender dateofbirth dateofdeath
0 10014729 f 2079-07-22 00:00:00 None`

```
1 10003400 f 2028-07-25 00:00:00 None
2 10002428 f 2020-07-30 00:00:00 None
*/
```

Agent: column_search(arguments={"table_names":"clinicalevents"})

Tool: CREATE TABLE cliniquevents (
 recordid INTEGER NOT NULL,
 patientid INTEGER NOT NULL,
 admissionid INTEGER NOT NULL,
 icuadmissionid INTEGER NOT NULL,
 itemcode INTEGER NOT NULL,
 recordeddatetime TEXT NOT NULL,
 value DOUBLE PRECISION,
 unit TEXT,
 PRIMARY KEY (recordid),
 FOREIGN KEY (itemcode) REFERENCES clinicalitemtypes (itemcode),
 FOREIGN KEY (icuadmissionid) REFERENCES icuepisodes (icuadmissionid),
 FOREIGN KEY (admissionid) REFERENCES hospitaladmissions (admissionid)

)

/*

3 rows from cliniquevents table:

recordid	patientid	admissionid	icuadmissionid	itemcode	recordeddatetime	value	unit
----------	-----------	-------------	----------------	----------	------------------	-------	------

0	10005817	20626031	32604416	220210	2100-12-24 00:00:00	19.0	insp/min
---	----------	----------	----------	--------	---------------------	------	----------

1	10005817	20626031	32604416	220051	2100-12-24 00:00:00	37.0	mmhg
---	----------	----------	----------	--------	---------------------	------	------

2	10005817	20626031	32604416	223762	2100-12-24 00:00:00	37.0	c
---	----------	----------	----------	--------	---------------------	------	---

*/

Agent: column_search(arguments={"table_names":"clinicalitemtypes"})

Tool: CREATE TABLE clinicalitemtypes (
 recordid INTEGER NOT NULL,
 itemcode INTEGER NOT NULL,
 itemname TEXT NOT NULL,
 abbreviation TEXT NOT NULL,
 itemtype TEXT NOT NULL,
 PRIMARY KEY (recordid)

)

/*

3 rows from clinicalitemtypes table:

recordid	itemcode	itemname	abbreviation	itemtype
----------	----------	----------	--------------	----------

0	226228	gender	gender	clinicalevents
---	--------	--------	--------	----------------

```
1 226545 race race cliniquevents
2 229877 suction events (ch) suction events (ch) cliniquevents
*/
```

Agent: value_substring_search(arguments={"table":"clinicalitemtypes","column":"itemname","value":"family history"})

Tool: No values in clinicalitemtypes.itemname contain 'family history'.

Agent: value_similarity_search(arguments={"table":"clinicalitemtypes","column":"itemname","value":"family history"})

Tool: No matches found in clinicalitemtypes.itemname for 'family history'.

Agent: column_search(arguments={"table_names":"hospitaladmissions"})

Tool: CREATE TABLE hospitaladmissions (
 recordid INTEGER NOT NULL,
 patientid INTEGER NOT NULL,
 admissionid INTEGER NOT NULL,
 admitdatetime TEXT NOT NULL,
 dischargedatetime TEXT,
 admissiontype TEXT NOT NULL,
 admitsource TEXT NOT NULL,
 dischargedestination TEXT,
 insurancetype TEXT NOT NULL,
 language TEXT,
 maritalstatus TEXT,
 age INTEGER NOT NULL,
 PRIMARY KEY (recordid),
 FOREIGN KEY (patientid) REFERENCES demographics (patientid)
)
/*

3 rows from hospitaladmissions table:

recordid	patientid	admissionid	admitdatetime	dischargedatetime	admissiontype	admitsource	dischargedestination	insurancetype	language	maritalstatus	age
0	10004235	24181354	2100-03-19 14:38:00	2100-03-28 14:02:00	urgent transfer from hospital	skilled nursing facility	medicaid	english	single	47	
1	10009628	25926192	2100-09-30 17:08:00	2100-10-08 13:20:00	urgent transfer from hospital	home health care	medicaid	?	married	58	
2	10006053	22942076	2100-11-15 23:39:00	2100-11-17 17:20:00	urgent transfer from hospital	died	medicaid	english	None	52	

*/

Agent: column_search(arguments={"table.names":"demographics"})

Tool: CREATE TABLE demographics (
 recordid INTEGER NOT NULL,
 patientid INTEGER NOT NULL,
 gender TEXT NOT NULL,
 dateofbirth TEXT NOT NULL,
 dateofdeath TEXT,
 PRIMARY KEY (recordid)

)

/*

3 rows from demographics table:

recordid patientid gender dateofbirth dateofdeath

0 10014729 f 2079-07-22 00:00:00 None

1 10003400 f 2028-07-25 00:00:00 None

2 10002428 f 2020-07-30 00:00:00 None

*/

Agent: column_search(arguments={"table.names":"clinicalevents"})

Tool: CREATE TABLE cliniquevents (
 recordid INTEGER NOT NULL,
 patientid INTEGER NOT NULL,
 admissionid INTEGER NOT NULL,
 icuadmissionid INTEGER NOT NULL,
 itemcode INTEGER NOT NULL,
 recordeddatetime TEXT NOT NULL,
 value DOUBLE PRECISION,
 unit TEXT,
 PRIMARY KEY (recordid),
 FOREIGN KEY (itemcode) REFERENCES clinicalitemtypes (itemcode),
 FOREIGN KEY (icuadmissionid) REFERENCES icuepisodes (icuadmissionid),
 FOREIGN KEY (admissionid) REFERENCES hospitaladmissions (admissionid)

)

/*

3 rows from cliniquevents table:

recordid patientid admissionid icuadmissionid itemcode recordeddatetime value unit

0 10005817 20626031 32604416 220210 2100-12-24 00:00:00 19.0 insp/min

1 10005817 20626031 32604416 220051 2100-12-24 00:00:00 37.0 mmhg

2 10005817 20626031 32604416 223762 2100-12-24 00:00:00 37.0 C

*/

Agent: value_substring_search(arguments={"table":"clinicalitemtypes","column":"itemname","value":"cancer"})

Tool: No values in clinicalitemtypes.itemname contain 'cancer'.

Agent: value_similarity_search({"table":"clinicalitemtypes","column":"itemname","value":"cancer"})

Tool: No matches found in clinicalitemtypes.itemname for 'cancer'.

Agent: It seems that I couldn't find any specific entries related to "family history of breast cancer" in the database. This could mean that the information is either stored in a different format or not recorded in the tables I checked.

To proceed, I can look for any general family history or cancer-related entries in the clinical events or demographics tables. Would you like me to do that?

User: Yes, please check for any general family history or cancer-related info.

Agent: value_substring_search(arguments={"table": "clinicalitemtypes", "column": "itemname", "value": "family history"})

Tool: No values in clinicalitemtypes.itemname contain 'family history'.

Agent: value_substring_search(arguments={"table":"clinicalitemtypes","column":"itemname","value":"cancer"})

Tool: No values in clinicalitemtypes.itemname contain 'cancer'.

Agent: I have searched for general family history and cancer-related information in the database, but unfortunately, I couldn't find any relevant entries in the clinical item types. It appears that the information regarding family history of breast cancer may not be explicitly recorded in the database, or it might be stored in a different format or table that I haven't checked. If you have any other specific criteria or different information you would like to explore, please let me know!

User: Okay, can you at least tell me how many patients have been admitted in the last 90 days?

Agent: `sql.execute(arguments={"query": "SELECT COUNT(DISTINCT patientid) AS patient_count FROM hospitaladmissions WHERE admitdatetime >= '2100-09-30'"})`

Tool: [(38,)]

Agent: There have been 38 patients admitted to the hospital in the last 90 days. If you have any other questions or need further assistance, feel free to ask!

User: Okay, so you couldn't find the family history info. Just to confirm, you were able to find the number of patients admitted in the last 90 days?

Agent: Yes, that's correct! I was able to find that there have been 38 patients admitted to the hospital in the last 90 days. However, I couldn't find any specific information regarding family history of breast cancer in the database. If you have any other questions or need further assistance, please let me know!

User: Double check that you've covered my goals: the number of patients admitted in the last 90 days with a family history of breast cancer.

Agent: I understand your request clearly now. You want to know the number of patients who were admitted in the last 90 days and also have a family history of breast cancer. Unfortunately, I was unable to find any specific entries related to family history of breast cancer in the database. This means I cannot confirm how many patients meet both criteria. If you have any other specific information or different criteria you would like to explore, please let me know!

User: ###END###

D.2 ADAPTIVE QUERY REFINEMENT

D.2.1 SUCCESSFUL CASE (ADAPTQA)

The user initially asks whether a specific patient was prescribed carbamazepine for epilepsy treatment, but the agent finds that no such records exist for the patient. The user then requests information about other medications for epilepsy. The agent searches the database using clinical knowledge with keywords such as levetiracetam, phenytoin, and phenobarbital. The agent checks whether the patient was prescribed any of these medications and successfully retrieves the most recent prescription date for levetiracetam, as requested.

User: I'm looking into patient prescriptions. Can you help me find some info about the medications prescribed to patient ID 10008287?

Agent: `table_search(arguments={"tool_input":""})`

Tool: admissiondiagnoses, admissionprocedures, cliniquevents, clinicalitemtypes, costrecords, demographics, diagnosis codes, hospitaladmissions, icuepisodes, intake records, labresults, labtesttypes, medicationorders, microbiologyresults, outputrecords, patienttransfers, procedurecodes

Agent: `column_search(arguments={"table_names":"medicationorders"})`

Tool: CREATE TABLE medicationorders (
 recordid INTEGER NOT NULL,
 patientid INTEGER NOT NULL,
 admissionid INTEGER NOT NULL,
 startdatetime TEXT NOT NULL,
 enddatetime TEXT,
 medicationname TEXT NOT NULL,
 dosevalue TEXT NOT NULL,
 doseunit TEXT NOT NULL,
 administrationroute TEXT NOT NULL,
 PRIMARY KEY (recordid),
 FOREIGN KEY (admissionid) REFERENCES hospitaladmissions (admissionid)
)
/*
3 rows from medicationorders table:
recordid patientid admissionid startdatetime enddatetime medicationname dosevalue
doseunit administrationroute
0 10020740 23831430 2100-04-19 11:00:00 2100-04-20 22:00:00 insulin 0.0 unit sc
1 10005817 20626031 2100-12-20 02:00:00 2100-12-21 12:00:00 insulin 0.0 unit sc
2 10005817 20626031 2100-12-27 10:00:00 2100-12-28 19:00:00 insulin 0.0 unit sc
*/

Agent: Could you clarify which details you'd like to see for patient 10008287's prescriptions ? For example, are you interested in the medication names only, the start/end dates, dosages, administration routes, or all of those?

User: I'm particularly interested in whether patient 10008287 was prescribed carbamazepine for epilepsy. If so, I want to know the most recent time it was prescribed, but only after their first epilepsy diagnosis.

Agent: `value_substring_search(arguments={"table":"medicationorders","column":"medicationname","value":"carbamazepine","k":10})`

Tool: Values in medicationorders.medicationname containing 'carbamazepine': ['carbamazepine'].

Agent: `column_search(arguments={"table_names":"admissiondiagnoses"})`

Tool: CREATE TABLE admissiondiagnoses (
 recordid INTEGER NOT NULL,
 patientid INTEGER NOT NULL,
 admissionid INTEGER NOT NULL,
 icdcode TEXT NOT NULL,
 codeversion INTEGER NOT NULL,
 recordeddatetime TEXT NOT NULL,
 PRIMARY KEY (recordid),
 FOREIGN KEY (codeversion) REFERENCES diagnosiscodes (codeversion),
 FOREIGN KEY (icdcode) REFERENCES diagnosiscodes (icdcode),
 FOREIGN KEY (admissionid) REFERENCES hospitaladmissions (admissionid)
)
/*
3 rows from admissiondiagnoses table:
recordid patientid admissionid icdcode codeversion recordeddatetime
0 10035185 22580999 4139 9 2100-05-17 12:53:00
1 10035185 22580999 v707 9 2100-05-17 12:53:00
2 10035185 22580999 41401 9 2100-05-17 12:53:00
*/

Agent: `column_search(arguments={"table_names":"diagnosiscodes"})`

Tool: CREATE TABLE diagnosiscodes (
 recordid INTEGER NOT NULL,
 icdcode TEXT NOT NULL,
 codeversion INTEGER NOT NULL,

```

description TEXT NOT NULL,
PRIMARY KEY (recordid)
)

```

```

/*

```

3 rows from diagnosiscodes table:

```
recordid icdcode codeversion description
```

```
0 0090 9 infectious colitis, enteritis, and gastroenteritis
```

```
1 01160 9 tuberculous pneumonia [any form], unspecified
```

```
2 01186 9 other specified pulmonary tuberculosis, tubercle bacilli not found by
bacteriological or histological examination, but tuberculosis confirmed by other methods [
inoculation of animals]
```

```
*/
```

Agent: value_substring_search(arguments={"table":"diagnosiscodes","column":"description","value":"epilepsy","k":10})

Tool: Values in diagnosiscodes.description containing 'epilepsy': ['epilepsy complicating pregnancy, childbirth, or the puerperium, delivered, with mention of postpartum complication', 'epilepsy, unspecified, without mention of intractable epilepsy', 'epilepsia partialis continua, with intractable epilepsy', 'epilepsy complicating pregnancy, childbirth, or the puerperium, unspecified as to episode of care or not applicable', 'localization-related (focal) (partial) epilepsy and epileptic syndromes with complex partial seizures, with intractable epilepsy', 'generalized convulsive epilepsy, with intractable epilepsy', 'localization-related (focal) (partial) epilepsy and epileptic syndromes with complex partial seizures, without mention of intractable epilepsy', 'localization-related (focal) (partial) epilepsy and epileptic syndromes with simple partial seizures, without mention of intractable epilepsy', 'epilepsia partialis continua, without mention of intractable epilepsy', 'epilepsy complicating pregnancy, childbirth, or the puerperium, postpartum condition or complication'].

Tool: sql.execute(arguments={"query": "SELECT MAX(mo.startdatetime) AS most_recent_prescription FROM medicationorders mo WHERE mo.patientid = 10008287 AND mo.medicationname = 'carbamazepine' AND mo.startdatetime > (SELECT MIN(ad.recordeddatetime) FROM admissiondiagnoses ad JOIN diagnosiscodes dc ON ad.icdcode = dc.icdcode AND ad.codeversion = dc.codeversion WHERE ad.patientid = 10008287 AND dc.description LIKE '%epilepsy%');"})

Tool: [(None,)]

Agent: sql.execute(arguments={"query": "SELECT ad.recordeddatetime AS diagnosis_time FROM admissiondiagnoses ad JOIN diagnosiscodes dc ON ad.icdcode = dc.icdcode AND ad."})

codeversion = dc.codeversion WHERE ad.patientid = 10008287 AND dc.description LIKE '%epilepsy%' ORDER BY ad.recordeddatetime ASC LIMIT 1;"))

Tool: [('2100-10-09 01:17:00',)]

Agent: sql.execute(arguments={"query": "SELECT * FROM medicationorders WHERE patientid = 10008287;"})

Tool: [(354, 10008287, 22168393, '2100-10-10 09:00:00', '2100-10-10 10:00:00', 'bag', '1.o', 'bag', 'iv'), (356, 10008287, 22168393, '2100-10-10 07:00:00', '2100-10-10 08:00:00', 'bag', '1.o', 'bag', 'iv'), (655, 10008287, 22168393, '2100-10-09 22:00:00', '2100-10-11 01:00:00', 'cefazolin', '1.o', 'g', 'iv'), ..., (6797, 10008287, 22168393, '2100-10-09 22:00:00', '2100-10-10 10:00:00', '0.9% sodium chloride', '1000.o', 'ml', 'iv'), (6804, 10008287, 22168393, '2100-10-09 22:00:00', '2100-10-10 10:00:00', '0.9% sodium chloride', '1000.o', 'ml', 'iv')]

Agent: sql.execute(arguments={"query": "SELECT COUNT(*) AS count_prescriptions FROM medicationorders WHERE patientid = 10008287 AND medicationname = 'carbamazepine;'"})

Tool: [(0,)]

Agent: The answer is <answer>No, patient 10008287 was not prescribed carbamazepine after their first epilepsy diagnosis.</answer>

User: Ok, if carbamazepine wasn't prescribed, can you check if they were prescribed any other medications for epilepsy after their first epilepsy diagnosis? If so, give me the most recent prescription time.

Agent: sql.execute(arguments={"query": "WITH first_epi AS (SELECT MIN(ad.recordeddatetime) AS dt FROM admissiondiagnoses ad JOIN diagnosisicdcode dc ON ad.icdcode = dc.icdcode AND ad.codeversion = dc.codeversion WHERE ad.patientid = 10008287 AND dc.description LIKE '%epilepsy%') SELECT MAX(m.startdatetime) AS most_recent_prescription FROM medicationorders m JOIN first_epi f ON m.startdatetime > f.dt WHERE m.patientid = 10008287 AND (m.medicationname LIKE '%levetiracetam%' OR m.medicationname LIKE '%phenytoin%' OR m.medicationname LIKE '%phenobarbital%' OR m.medicationname LIKE '%valpro%' OR m.medicationname LIKE '%lamotr%' OR m.medicationname LIKE '%gabapentin%' OR m.medicationname LIKE '%topir%' OR m.medicationname LIKE '%pregabat%' OR m.medicationname LIKE '%ethosux%' OR m.medicationname LIKE '%lacosamide%');"})

Tool: [('2100-10-12 20:00:00',)]

Agent: The answer is <answer>2100-10-12 20:00:00</answer>

User: Great! Just to be sure, this time represents the most recent time patient 10008287 was prescribed any medication for epilepsy after their first diagnosis? I need the answer in the exact time format recorded in the database.

Agent: Yes, that is correct. The most recent epilepsy medication prescription time after their first epilepsy diagnosis is <answer>2100-10-12 20:00:00</answer>.

User: Perfect, thanks!

###END###

D.2.2 FAILED CASE (ADAPTQA)

After the user initially asks about carbamazepine for epilepsy treatment for a specific patient, the agent finds no relevant data. The user then asks about other medications for epilepsy. The agent uses a web search tool to retrieve a list of medications, including levetiracetam. The agent writes an SQL query using the diagnosis “epilepsy, unspecified” and the medication list for the patient. However, since the patient was diagnosed with “epilepsy, unspecified, not intractable, without status epilepticus,” the agent fails to retrieve the specific data needed, despite having the list of epilepsy medications.

User: I want to know about the prescriptions for patient ID 10008287.

Agent: Could you please specify what information about the prescriptions you are interested in? For example, are you looking for the medication names, dosages, dates, or something else?

User: I’m interested in finding out if patient 10008287 was prescribed carbamazepine for epilepsy. If they were, I need the most recent prescription time after their first epilepsy diagnosis.

Agent: Okay, I need to find out if patient 10008287 has been diagnosed with epilepsy and prescribed carbamazepine. Then, if both conditions are met, I need to find the most recent prescription time for carbamazepine after the first epilepsy diagnosis. First, I need to find the relevant tables containing diagnoses and medication orders.

Agent: `table_search(arguments={"tool_input": ""})`

Tool: admissiondiagnoses, admissionprocedures, cliniquevents, clinicalitemtypes, costrecords, demographics, diagnosiscodes, hospitaladmissions, icuepisodes, intake records, labresults, labtesttypes, medicationorders, microbiologyresults, outputrecords, patienttransfers, procedurecodes

Agent: Okay, the tables admissiondiagnoses and medicationorders seem relevant. I need to explore these tables to see how diagnoses and medication orders are recorded.

Agent: `column_search(arguments={"table_names": "admissiondiagnoses, medicationorders"})`

Tool: CREATE TABLE admissiondiagnoses (
 recordid INTEGER NOT NULL,
 patientid INTEGER NOT NULL,
 admissionid INTEGER NOT NULL,
 icdcode TEXT NOT NULL,
 codeversion INTEGER NOT NULL,
 recordeddatetime TEXT NOT NULL,

```
PRIMARY KEY (recordid),
FOREIGN KEY (codeversion) REFERENCES diagnosiscodes (codeversion),
FOREIGN KEY (icdcode) REFERENCES diagnosiscodes (icdcode),
FOREIGN KEY (admissionid) REFERENCES hospitaladmissions (admissionid)
)
/*
3 rows from admissiondiagnoses table:
recordid patientid admissionid icdcode codeversion recordeddatetime
0 10035185 22580999 4139 9 2100-05-17 12:53:00
1 10035185 22580999 v707 9 2100-05-17 12:53:00
2 10035185 22580999 4140 9 2100-05-17 12:53:00
*/
```

```
CREATE TABLE medicationorders (
  recordid INTEGER NOT NULL,
  patientid INTEGER NOT NULL,
  admissionid INTEGER NOT NULL,
  startdatetime TEXT NOT NULL,
  enddatetime TEXT,
  medicationname TEXT NOT NULL,
  dosevalue TEXT NOT NULL,
  doseunit TEXT NOT NULL,
  administrationroute TEXT NOT NULL,
  PRIMARY KEY (recordid),
  FOREIGN KEY (admissionid) REFERENCES hospitaladmissions (admissionid)
)
/*
3 rows from medicationorders table:
recordid patientid admissionid startdatetime enddatetime medicationname dosevalue
doseunit administrationroute
0 10020740 23831430 2100-04-19 11:00:00 2100-04-20 22:00:00 insulin 0.0 unit sc
1 10005817 20626031 2100-12-20 02:00:00 2100-12-21 12:00:00 insulin 0.0 unit sc
2 10005817 20626031 2100-12-27 10:00:00 2100-12-28 19:00:00 insulin 0.0 unit sc
*/
```

Agent: Now I need to find the icdcode for epilepsy in the diagnosiscodes table. I will use value_similarity_search to find similar values to "epilepsy" in the description column of the diagnosiscodes table.

Agent: value_similarity_search(arguments={"column": "description", "table": "diagnosiscodes", "value": "epilepsy"})

Tool: I found close matches in diagnosiscodes.description: ['epilepsy and recurrent seizures', 'epilepsy, unspecified', 'other epilepsy', 'epileptic spasms', 'epilepsy, unspecified, not intractable', 'epilepsy, unspecified, without mention of intractable epilepsy', 'epilepsy, unspecified, with intractable epilepsy', 'epilepsy, unspecified, intractable', 'other epilepsy and recurrent seizures', 'epilepsy, unspecified, intractable, without status epilepticus', 'epilepsy, unspecified, not intractable, without status epilepticus', 'other epilepsy, intractable, without status epilepticus', 'epilepsy, unspecified, intractable, with status epilepticus', 'other epilepsy, intractable, with status epilepticus', 'epilepsy, unspecified, not intractable, with status epilepticus', 'generalized idiopathic epilepsy and epileptic syndromes', 'other epilepsy, not intractable, without status epilepticus', 'generalized idiopathic epilepsy and epileptic syndromes, intractable'].

Agent: The value similarity search returned several matches. To proceed, I will use 'epilepsy, unspecified' as the diagnosis for epilepsy. Now I need to check if patient 10008287 was diagnosed with 'epilepsy, unspecified' and prescribed 'carbamazepine'. If so, I need to find the most recent prescription time after the first epilepsy diagnosis.

Agent: value_substring_search(arguments={"column": "medicationname", "table": "medicationorders", "value": "carbamazepine"})

Tool: Values in medicationorders.medicationname containing 'carbamazepine': ['carbamazepine'].

Agent: Okay, the medication name is 'carbamazepine'. Now I have all the information I need to construct the SQL query.

Agent: sql.execute(arguments={"query": "SELECT MAX(m.startdatetime) FROM medicationorders m JOIN admissiondiagnoses a ON m.patientid = a.patientid WHERE m.patientid = 10008287 AND m.medicationname = 'carbamazepine' AND a.icdcode IN (SELECT icdcode FROM diagnosiscodes WHERE description = 'epilepsy, unspecified') AND m.startdatetime > (SELECT MIN(recordeddatetime) FROM admissiondiagnoses a2 WHERE a2.patientid = 10008287 AND a2.icdcode IN (SELECT icdcode FROM diagnosiscodes WHERE description = 'epilepsy, unspecified'))"})

Tool: [(None,)]

Agent: The query returned None, which means either the patient was not diagnosed with epilepsy, was not prescribed carbamazepine, or the prescription occurred before the diagnosis.

Agent: `sql.execute(arguments={"query": "SELECT MIN(recordeddatetime) FROM admissiondiagnoses a WHERE a.patientid = 10008287 AND a.icdcode IN (SELECT icdcode FROM diagnosiscodes WHERE description = 'epilepsy, unspecified')")`

Tool: [(None,)]

Agent: Since the query to find the first epilepsy diagnosis returned None, it means the patient was never diagnosed with epilepsy. Therefore, I cannot find the most recent carbamazepine prescription time after the first epilepsy diagnosis.

Agent: `sql.execute(arguments={"query": "SELECT DISTINCT patientid FROM medicationorders WHERE medicationname = 'carbamazepine' AND patientid = 10008287")`

Tool: []

Agent: The patient 10008287 was not prescribed carbamazepine. Therefore, I cannot find the most recent carbamazepine prescription time after the first epilepsy diagnosis. <answer>Patient 10008287 was not diagnosed with epilepsy and was not prescribed carbamazepine.</answer>

User: Okay, if they weren't prescribed carbamazepine, I'd like to know if they were prescribed any other medications for epilepsy. If so, I want the most recent prescription time after their first epilepsy diagnosis, just like I asked for carbamazepine.

Agent: Okay, I need to find out if patient 10008287 has been diagnosed with epilepsy. If they have, I need to find any medications prescribed to them that are used to treat epilepsy and then find the most recent prescription time for those medications after the first epilepsy diagnosis. First, I need to identify medications used to treat epilepsy. I will use a web search for this.

Agent: `web_search(arguments={"query": "medications used to treat epilepsy"})`

Tool: [

"Below is a list of some of the most common brand-name drugs currently used to treat epilepsy. Your doctor may prefer that you take the brand name of anticonvulsant and not the generic substitution. Talk with your doctor about this important issue.\n\nBrivaracetam (Briviact)\n\nCannabidiol (Epidiolex)\n\nCarbamazepine (Carbatrol or Tegretol)\n\nCenobamate(Xcopri)\n\nDiazepam (Valium), lorazepam (Ativan) and similar benzodiazepine tranquilizers such as clonazepam (Klonopin)\n\nEslicarbazepine (Aptiom) [...]\n\nEthosuximide (Zarontin)\n\nFelbamate (Felbatol)\n\nFenfluramine (Fintepla)\n\nLacosamide (VIMPAT)\n\nLamotrigine (Lamictal)\n\nLevetiracetam (Keppra)\n\nOxcarbazepine (Oxtellar XR, Trileptal)\n\nPerampanel (Fycompa)\n\nPhenobarbital\n\n

nPhenytoin (Dilantin)\n\nPregabalin (Lyrica)\n\nTiagabine (Gabitril)\n\nTopiramate (Topamax)\n\nValproate, valproic acid (Depakene, Depakote)\n\nZonisamide (Zonegran) [...]

The most commonly used medications are benzodiazepines because they get into the bloodstream quickly to start working on the brain to stop the seizure. They include:\n\n

Epilepsy Drug Guidelines\n\nIt may take several months before the best drug and dosage are determined for you. During this adjustment period, you will be carefully monitored through frequent blood tests to measure your response to the medication.”,

”Below is a list of some of the most common brand-name drugs currently used to treat epilepsy. Your doctor may prefer that you take the brand name of anticonvulsant and not the generic substitution. Talk with your doctor about this important issue.\n\n

nBrivaracetam (Briviact)\n\nCannabidiol (Epidiolex)\n\nCarbamazepine (Carbatrol or Tegretol)\n\nCenobamate(Xcopri)\n\nDiazepam (Valium), lorazepam (Ativan) and similar benzodiazepine tranquilizers such as clonazepam (Klonopin)\n\nEslicarbazepine (Aptiom) [...]

Ethosuximide (Zarontin)\n\nFelbamate (Felbatol)\n\nFenfluramine (Fintepla)\n\nLacosamide (VIMPAT)\n\nLamotrigine (Lamictal)\n\nLevetiracetam (Keppra)\n\nOxcarbazepine (Oxtellar XR, Trileptal)\n\nPerampanel (Fycompa)\n\nPhenobarbital\n\nPhenytoin (Dilantin)\n\nPregabalin (Lyrica)\n\nTiagabine (Gabitril)\n\nTopiramate (Topamax)\n\nValproate, valproic acid (Depakene, Depakote)\n\nZonisamide (Zonegran) [...]

The most commonly used medications are benzodiazepines because they get into the bloodstream quickly to start working on the brain to stop the seizure. They include:\n\n

Epilepsy Drug Guidelines\n\nIt may take several months before the best drug and dosage are determined for you. During this adjustment period, you will be carefully monitored through frequent blood tests to measure your response to the medication.”,

”Medications used to treat epilepsy are called antiepileptic drugs (AEDs). There are more than 30 prescription AEDs on the market, and they’re mostly available as oral tablets or capsules.\n\nYour options depend on:\n\n

Types of antiepileptic drugs (AEDs)\n\n

There are two types of medications for epilepsy:\n\nSome people may need to take more than one medication to prevent seizures. [...]

Levetiracetam (Elepsia XR, Keppra, Keppra XR, Spritam)\n\nLevetiracetam (Elepsia XR, Keppra, Keppra XR, Spritam) may treat a range of epileptic seizures, including:\n\nIt’s available as a pill, an IV solution, an oral solution, and an injection.\n\nLevetiracetam may cause fewer side effects than other medications used for epilepsy. It’s safe to take during pregnancy, according to experts such as the United Kingdom’s Commission on Human Medicines.\n\n

Lorazepam (Ativan) [...]

Lorazepam (Ativan) is a benzodiazepine that’s used to treat all types of seizures. It’s also used to treat status epilepticus. Status epilepticus is a prolonged, critical seizure that’s regarded as a medical emergency.\n\nIt’s available as a pill, an oral concentrate, and an injection.\n\n

Methsuximide (Celontin)\n\n

Methsuximide (Celontin) is used for absence seizures. It’s prescribed when other treatments don’t work in treating your seizures.”,

”Donate\n\nPopular searches: Diagnosing Epilepsy Treatments and Therapies what is epilepsy\n\nMake an Impact\n\nEpilepsy and Seizure Medications\n\n

=====\n\n

Learn about FDA-approved medications to

treat epilepsy and seizures. \n\nImage 7: Epilepsy and Seizure Medications\n\nSearch\n\nFilter Alphabetically Select Clear\n\nLoading ... \n\n##### Acetazolamide\n\nMore info (Brand names: Diamox, Diamox Sequels, generics) [...] Acetazolamide (a SEET a ZOLE a mide) has been FDA-approved for the treatment of, along with other drugs, centrencephalic epilepsies (absence, generalized seizures). \n\n##### Brivaracetam\n\nMore info (Brand names: Briviact)\n\nBrivaracetam (briv a RA se tam) has been approved by the FDA to treat focal (partial) onset seizures in patients 1 month of age and older. \n\n##### Cannabidiol\n\nMore info (Brand names: Epidiolex) [...] More info (Brand names: Aptiom)\n\nEslicarbazepine acetate (ES li Kar BAZ e peen) has been approved by the FDA to treat focal onset seizures in patients 4 years of age and older. \n\n##### Ethosuximide\n\nMore info (Brand names: Zarontin, generics)\n\nEthosuximide (ETH oh SUX i mide) has been approved by the FDA to control absence (petit mal) epilepsy. \n\n##### Ethotoin\n\nMore info (Brand names: Peganone, generics)",

"Healthcare providers prescribe antiseizure medications to treat epilepsy and symptomatic seizures. They also prescribe these medications to prevent and/or treat seizures that happen during or following brain surgery. [...] Gray gradient\n\nGray gradient\n\nSearch Icon Blue\n\nCleveland Clinic logo\n\n# Antiseizure Medications (Formerly Known as Anticonvulsants)\n\nAntiseizure medications (anticonvulsants) help treat epilepsy and other causes of seizures. They can treat other conditions as well, like anxiety and neuropathic pain. There are several different types of antiseizure medications. You and your healthcare provider will work together to find the best one for you. \n\nAdvertisement [...] Cleveland Clinic is a non-profit academic medical center. Advertising on our site helps support our mission. We do not endorse non-Cleveland Clinic products or services. Policy\n\n## Overview\n\n#### What are antiseizure medications (anticonvulsants)?\n\nAntiseizure medications (previously known as antiepileptic or anticonvulsant medications) are prescription medications that help treat and prevent seizures. Healthcare providers may prescribe these medications to treat other conditions as well.",

"Epilepsy Website Logo\n\n# List of Anti-Seizure Medications (ASMs)\n\n##### Understanding Epilepsy\n\nAnti-epileptic drugs (ASMs) are the main form of treatment for people living with epilepsy, with up to 70% (7 in 10 people) having their seizures controlled through this medication. \n\nIn Australia there are over 20 ASMs used to treat seizures. The ASMs prescribed are often selected on the basis of the seizure type/s, age, gender and side effects. ASMs may be prescribed as tablets, syrups and liquids.",

"One large randomized trial, the Standard and New Antiepileptic Drugs (SANAD) trial, demonstrated some comparative advantages of certain AEDs when treating focal or generalized epilepsy. In the end, when comparing valproate, lamotrigine, or topiramate for generalized seizures, they recommended valproic acid as their first-line choice. Additionally, when comparing carbamazepine, gabapentin, lamotrigine, oxcarbazepine, and topiramate for focal seizures, lamotrigine was cited as the first-line [...] In summary, it is now abundantly clear that anti-seizure medications wield disparate mechanistic profiles, but they all effectively suppress epileptic seizures in one way or another.

Accordingly, grouping the drugs together by mechanism is a very helpful organizing principle. From this viewpoint, it may become easier to appreciate that some drugs have different efficacy profiles for different seizure types and epilepsy syndromes.

Ethosuximide is an exception with its specific limited use with [...] Phenytoin is one of the oldest anti-seizure medications and is still widely used for focal and generalized seizures. It is also administered for status epilepticus. In addition, practitioners may invoke phenytoin as a second-line agent for patients with mixed seizure types (e.g., tonic-clonic and myoclonic). As mentioned, phenytoin blocks voltage-gated sodium channels, but other possible mechanisms revolve around decreased synaptic transmission, smaller changes in ionic gradients involving the”,

”Medicines.\n Surgery.\n Therapies that stimulate the brain using a device.\n A ketogenic diet.\n\n#### Medication\n\nMost people with epilepsy can become seizure-free by taking one anti-seizure medicine, which is also called an anti-epileptic medicine. Others may be able to decrease the number and intensity of their seizures by taking more than one medicine. [...] Tell your healthcare professional immediately if you notice new or increased feelings of depression or suicidal thoughts. Also contact your healthcare professional right away if you have changes in your mood or behaviors.\n Tell your healthcare professional if you have migraines. You may need an anti-seizure medicine that can prevent your migraines and treat epilepsy. [...] ### Potential future treatments\n\nResearchers are studying many potential new treatments for epilepsy, including:\n\nContinuous stimulation of the seizure onset zone, known as subthreshold stimulation. Subthreshold stimulation is continuous stimulation to an area of the brain below a level that’s physically noticeable. This type of therapy appears to improve seizure outcomes and quality of life for some people with seizures. Subthreshold stimulation helps stop a seizure before it happens.”,

”| stiripentol | Diacomite | Image 50: Medline unavailable | Image 51: Medline unavailable |\n| sulthiame | Ospolot | Image 52: Medline available | Image 53: Medline unavailable |\n| tiagabine | Gabitril | Image 54: Medline available | Image 55: Medline available |\n| topiramate | Topamax | Image 56: Medline available | Image 57: Medline available |\n| vigabatrin | Sabril | Image 58: Medline available | Image 59: Medline available | [...] | ethosuximide | Zarontin | Image 20: Medline available | Image 21: Medline available |\n| felbamate | Felbatol | Image 22: Mims unavailable | Image 23: Medline available |\n| gabapentin | Neurontin | Image 24: Medline available | Image 25: Medline available |\n| lacosamide | Vimpat | Image 26: Medline available | Image 27: Medline available |\n| lamotrigine | Lamictal | Image 28: Medline available | Image 29: Medline available | [...] | phenobarbitone | Phenobarbitone | Image 40: Medline available | Image 41: Medline unavailable |\n| phenytoin | Dilantin | Image 42: Medline available | Image 43: Medline available |\n| potassium bromide | Dibro-Be mono | Image 44: Medline unavailable | Image 45: Medline unavailable |\n| primidone | Mysoline | Image 46: Medline available | Image 47: Medline available |\n| sodium valproate | Epilim | Image 48: Medline available | Image 49: Medline available |”,

"Sodium valproate is an epilepsy drug prescribed for all seizure types including absence, myoclonus and tonic clonic seizures. New regulations have been introduced by the Medicines and Healthcare products Regulatory Agency (MHRA) around the way in which the drug, sodium valproate is prescribed to women and girls of childbearing age.\n\nLET'S STAY IN TOUCH... [...] The decision whether to start taking anti-epileptic drugs (AEDs) can be difficult, and there is a lot to think about. Here we look at the benefits and risks of taking, or not taking, AEDs.\n\nSodium valproate [...] Epilepsy Society\n\nSite Navigation\n\nUtility Nav\n\nSite Search\n\nbreadcrumb navigation:\n\nList of anti-seizure medication\n\nPublished on 8 October 2024\n\nUpdated: 7 April 2025\n\nAuthored by Anonymous\n\nAlso in this section\n\nList of anti-seizure medication\n\nHere is a list of anti-seizure medication (ASM), previously called anti-epileptic drugs or AEDs."

]

Agent: Based on the web search results, here's a list of medications commonly used to treat epilepsy:

Brivaracetam
Cannabidiol
Carbamazepine
Cenobamate
Diazepam
Lorazepam
Clonazepam
Eslicarbazepine
Ethosuximide
Felbamate
Fenfluramine
Lacosamide
Lamotrigine
Levetiracetam
Oxcarbazepine
Perampanel
Phenobarbital
Phenytoin
Pregabalin
Tiagabine
Topiramate
Valproate, valproic acid
Zonisamide
Acetazolamide
Methsuximide
Stiripentol

Sulthiame

Gabapentin

Primidone

Sodium valproate

I will now construct a query to find the most recent prescription time for any of these medications after the first epilepsy diagnosis.

Agent: `sql.execute("query": "SELECT MAX(m.startdatetime) FROM medicationorders m JOIN admissiondiagnoses a ON m.patientid = a.patientid WHERE m.patientid = 10008287 AND m.medicationname IN ('brivaracetam', 'cannabidiol', 'carbamazepine', 'cenobamate', 'diazepam', 'lorazepam', 'clonazepam', 'eslicarbazepine', 'ethosuximide', 'felbamate', 'fenfluramine', 'lacosamide', 'lamotrigine', 'levetiracetam', 'oxcarbazepine', 'perampanel', 'phenobarbital', 'phenytoin', 'pregabalin', 'tiagabine', 'topiramate', 'valproate', 'valproic acid', 'zonisamide', 'acetazolamide', 'methsuximide', 'stiripentol', 'sulthiame', 'gabapentin', 'primidone', 'sodium valproate') AND a.icdcode IN (SELECT icdcode FROM diagnosiscodes WHERE description = 'epilepsy, unspecified') AND m.startdatetime > (SELECT MIN(recordeddatetime) FROM admissiondiagnoses a2 WHERE a2.patientid = 10008287 AND a2.icdcode IN (SELECT icdcode FROM diagnosiscodes WHERE description = 'epilepsy, unspecified'))")`

Tool: [(None,)]

Agent: The query returned None, which means either the patient was not diagnosed with epilepsy, was not prescribed any of the listed medications, or the prescriptions occurred before the diagnosis. Since I already determined that the patient was not diagnosed with epilepsy, the result is None. <answer>Patient 10008287 was not diagnosed with epilepsy and was not prescribed any anti-epileptic medications.</answer>

User: Could you double check that your answer covers everything? I wanted to know if patient 10008287 was prescribed carbamazepine and, if not, if they were prescribed any other epilepsy meds. For any epilepsy meds, I need the most recent prescription time after their first epilepsy diagnosis.

Agent: Yes, I have confirmed that patient 10008287 was neither diagnosed with epilepsy nor prescribed carbamazepine or any other anti-epileptic medications from the list I generated using a web search. Therefore, I cannot provide a prescription time after their first epilepsy diagnosis. <answer>Patient 10008287 was not diagnosed with epilepsy and was not prescribed carbamazepine or any other anti-epileptic medications.</answer>

User: ###END###